


MODEL 1036-R101

TWO BODY MOBILE REFRIGERATOR

411 North Aerojet Avenue
 Azusa, CA 91702
 www.mortechmfg.com
 Tel (800) 410-0100
 (626) 334-1471
 Fax (626) 334-1704

Standard Design Features

- Unit ships fully assembled, simply plug unit into an outlet and the unit is operational
- Panel finishes:
Exterior front panel - 22 gauge Type 304 stainless steel with a No. 4 finish
Exterior balance - 20 gauge stucco embossed aluminum
Interior walls/ceiling - 20 gauge stucco embossed aluminum
Interior floor - 14 gauge smooth aluminum
- Insulation: 4 in./10 cm. foamed in place polyurethane insulation
- Flush mount door with clear opening of 27 in./68 cm. x 53 in./134 cm.
- Heavy-duty chrome plated hardware for long lasting use
- Telescoping Rack Mechanism: Three piece telescoping carriage fabricated of aluminum extrusion with maintenance free nylon rollers
- Body trays: Fabricated of 18 gauge Type 304 stainless steel with a No. 4 finish
- Casters: (4) 6 in./15 cm. diameter casters, two are swivel type with wheel brakes
- Drop-in self-contained refrigeration system with digital thermometer and easy to adjust temperature controller

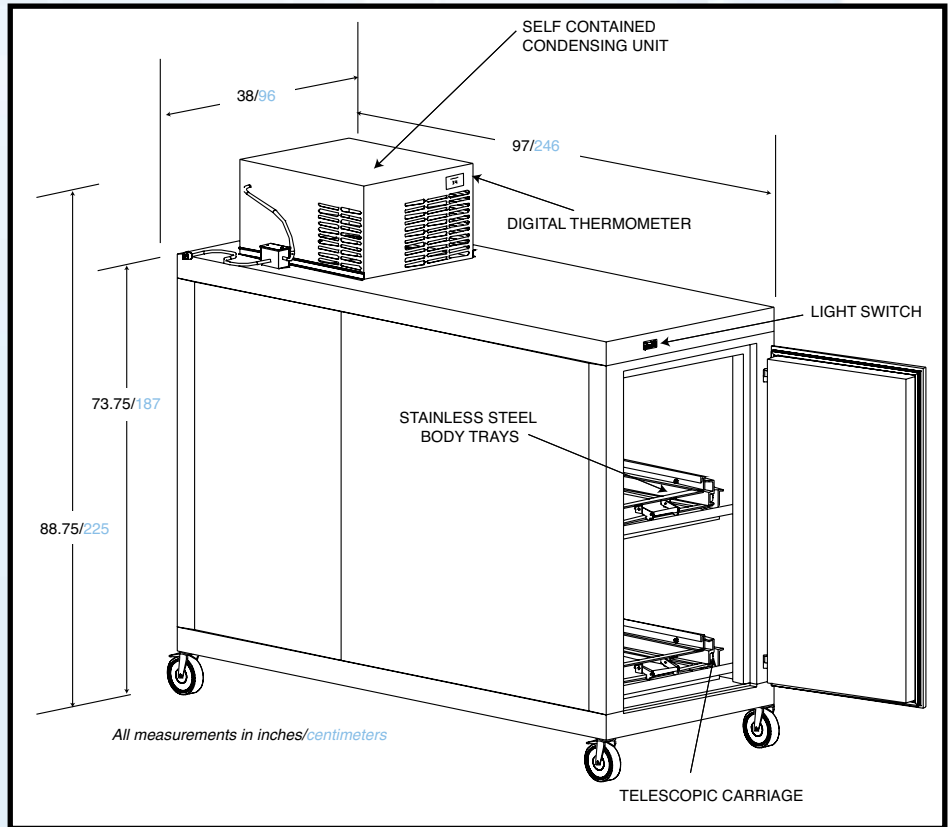

Specifications

Length: 97 in./246 cm.
 Width: 38 in./96 cm.
 Height: 88.75 in./225 cm. overall
 Door: 27 in./68 cm. x 53 in./134 cm.
 Temp: 38° F
 Voltage: 115v/60Hz/1Ph
 (other voltage by request)