



Standard Design Features

Exterior: Front - .032 Type 304 stainless steel with a No. 4 finish. Top, sides, and back - 20 gauge stucco embossed aluminum

Interior: Walls and Ceiling - 20 gauge stucco embossed aluminum floor - 14 gauge smooth aluminum

Dimensions: 82 in./208 cm. W X 97 in./246 cm. D X 86 in./218 cm. H

Insulation: 4 in./10 cm. foamed in place urethane (UL listed, Class 1)

Hardware: Chrome plated

Doors: (2) 32 in./81 cm. x 50 in./127 cm., flush style with magnetic gasket

Two-Tier Carrier: (Optional) Model 7020-26 (See page 11-09 for more information)

Ramp: Wood frame with galvanized wearing surface


Lighting: 1 - vapor proof light with switch

Refrigeration: Drop-in self-contained refrigeration system with digital thermometer and easy to adjust temperature controller

Operating Temperature: 38° F

Electrical: 115v/60Hz, single phase (other voltage by request)

Freezer model available
Model 1036-F107
Freezer operating temperature 0° F

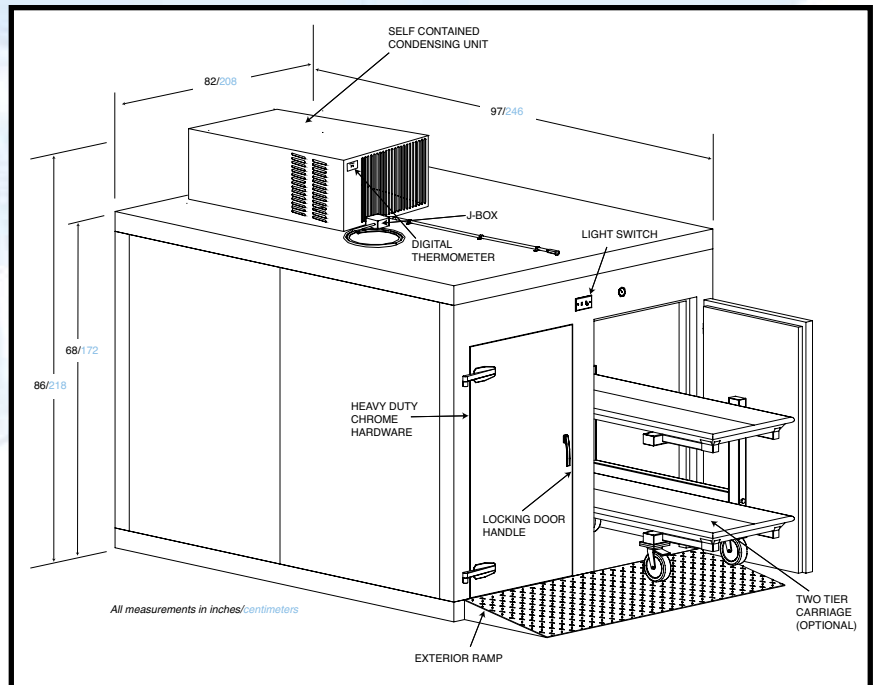

MODEL 1036-R107
TWO OR FOUR BODY REFRIGERATOR