

LABORATORY & PREP ROOM

Autopsy Saws & Vacuums2	2-5	Floor Scales	24
Autopsy Saw Blades	. 6	Smart Clean Floor Scales	25
Biopsy Bags		SLA100 Surgical Lighting and Mounting Options26-	-27
Stainless Steel Lab-ware8-	11		
Embalming Machine	12	SLA50 Surgical Lighting and Mounting Options	29
Portable Aspirators & Stand		SL7000, SL7000-LED & SL10000 Surgical Lighting and Mounting Options 30-	31
Body Bags		SELED Examination Light	32
Mortuary Undergarments	15	SLMAG Examination Light	
Hamper & Liners	16		
Head Rests & Body Supports	17	WAVE LED Magnifier Light	
Latex, Nitrile Gloves & Stainless Holders	18	SL7000, Dual Arm Mount Ceiling Mount, Articulating Arm Ceiling Mount	35
Dissecting Boards & Raised Dissecting Platforms	10	Mobile Specimen Photo Table	36
		Stainless Steel Utility Cart	37
Hanging Autopsy Scale		Mobile Utility Cabinet	38
Scale Pole & Bracket	21	Evidence Carts	
Digital Platform Scale	22		
Digital Washdown & Infant Scale	23	Laboratory Refrigerators / Freezers 40-	41

AUTOPSY SAW SERIES M5000

Portable Autopsy Saw Model M5000-1

Developed to help minimize the risk of cross infection in sensitive areas. Featuring a well balanced cutting head weighing just 1300g and is ergonomically designed to reduce user fatigue.

Hand piece is hermetically sealed and watertight. Enclosed motor cannot become contaminated and can be fully immersed for cleaning without any danger to the user, allowing disinfection and appropriate sterilization without dismantling. All external materials are non-corrosive.


Comprised of power supply and saw. Unit features one button operation to turn on both the saw and vacuum unit, reduced overloading via intelligent current limiter, increased power to handpiece, updated safety features, top mounted power lead and protected to IP65 wet environment rating. Available in 110V and 240V versions.

STANDARD DESIGN FEATURES

- Saw unit weight 3 lbs.
 Single press on/off Operation
 Efficient 13,200 Oscillation per minute cycle Watertight to IP67 rating

- Easy blade rotation and fixation
 Reduced overloading via electronic current limiting, device double pole fused
 Also available in 230V (Optional)



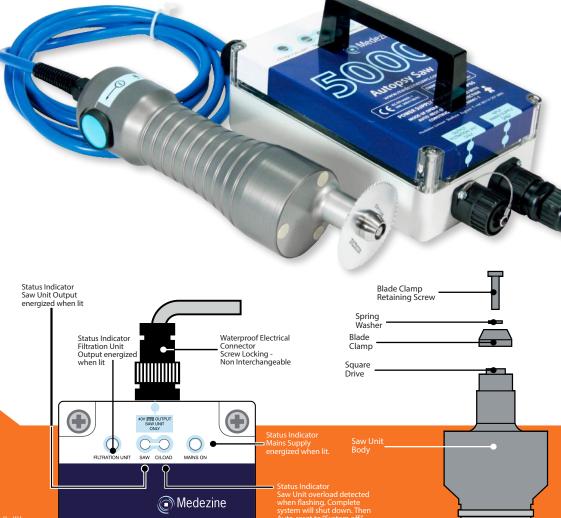


LABORATORY & PREP ROOM

ACCESSORIES

Autopsy Saw

(€ IEC/EN 60601-1 EMC 2004/108/EC



Captive Retaining Screws Enclosure Cover

Waterproof Electrical Connectors Screw Locking-Non Interchangeable

> Watertight Grommet

On/Off (I/O) Momentary Button

> Saw Unit Suppy Cable

FUSE REPLACEMENT

ISOLATE FROM ELECTRICAL SUPPLY BEFORE REMOVING COVER

The two mains supply fuses are located on the underside of the board in the position shown. The third fuse is an anti surge fuse. Fuse type and ratings are marked adjacent to the fuse holders. Undo the four captive retaining screws to remove the cover. Prior to replacement ensure that the rubber seal set into the underside cover has not been disturbed.

Retighten cover fully ensuring that the cover is seated properly.

VACUUM FILTRATION SYSTEM

Complete System includes Saw, Power Supply & Vacuum Unit

VACUUM - COMPLETE SYSTEM Model M5000-VAC

Vacuum unit incorporates a highly efficient three stage filter - paper filter bag, cloth filter and HEPA filter cartridge filtering down to 0.6 microns. Unit is drip proof to IP44 with a 7 liter bag capacity. Developed to help minimize the risk of cross infection in sensitive areas. Saw features a well balanced cutting head which weighs only 1300g and is ergonomically designed to reduce user fatigue. Hand piece is hermetically sealed and watertight. All external materials are non-corrosive.

Power supply unit features one button operation to turn on both the saw and vacuum unit, reduced overloading via intelligent current limiter, increased power to hand-piece, updated safety features, top mounted power lead and protected to IP65 wet environment rating.

This unit is not watertight and not designed for liquid extraction.

Hose/Filtration Unit Connector

Filtration Unit

Top Cover

STANDARD DESIGN FEATURES

- Redesigned power supply increases power to the hand piece to cope with increased demand
- Top mounted power lead for easy hand piece removal
- New hand piece storage position to improve stability
- Larger chassis wheels for easier maneuverability
- Hand piece contains heavy duty bearings for longer life

Vacuum unit also available individually.

. Handle

Vacuum Hose

Vacuum


Cowelling

Hose/Cowling



LABORATORY & PREP ROOM


ACCESSORIES

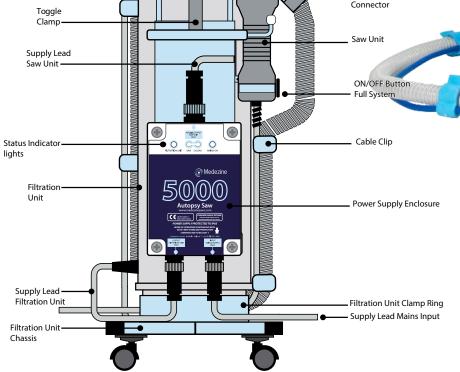

Replacement Filter Kit Model M5000-FR

Contains all required components for operation of unit.

- 50 Paper Filters
- 1 Cloth Filter
- 1 HEPA filter
- 10 Vacuum Hoods
- 1 Vacuum Hose with quick release fittings.

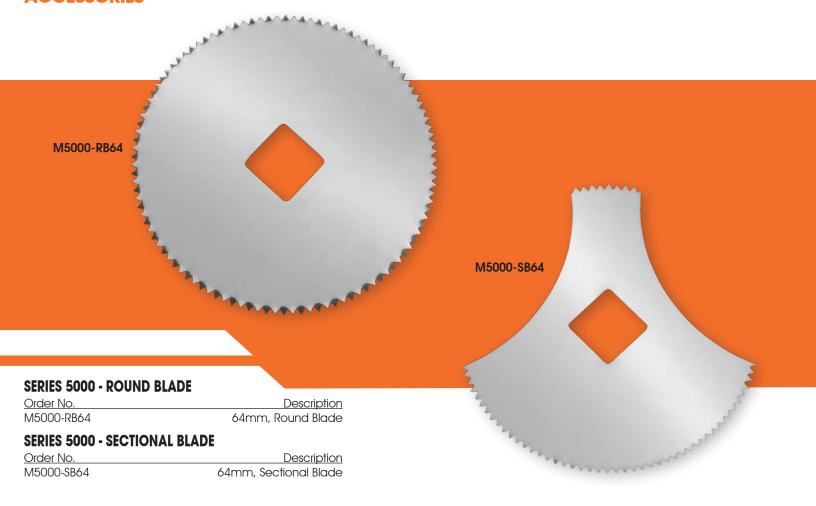

Looking to add a new Autopsy Saw



Call for More Information (800) 410-0100





AUTOPSY SAW BLADES& ACCESSORIES SERIES 5000

All measurements in inches/centimeters

AUTOPSY SAW & BONE DUST COLLECTOR

AUTOPSY SAW Model 0295-270

Unit ships complete with 2.5 in./6 cm. diameter section blade with arbor, wrench, owner's manual and registration card.

- Cool operation gives greater user comfort
- Reduced noise level
- Teflon housing cleans easily
- Ten foot cord for greater mobility
- 11 in./27 cm. length, 3 lbs 4 oz. weight
 ~230V Transformer available (Optional)

BONE DUST VACUUM Model 0295-420

Unit ships complete with vacuum nozzle adapter and owner's manual


	15 in./38 cm.
Length:	23 in./58 cm.
Height:	23.5 in./ <mark>59 cm</mark> .

- 115 volt, 8.5 amps
- Reduced noise level
- Powerful enough for even the smallest particles
- Disposable filter cartridge traps more dust particles without clogging and is easy and safe to replace
- 10 foot power cord
- M810 Stryker Autopsy Saw Adapter

Additional requirement and cost for the bone dust vacuum




DISPOSABLE HEPA FILTER Model 0295-410







AUTOPSY SAW & BONE DUST COLLECTOR ADAPTER

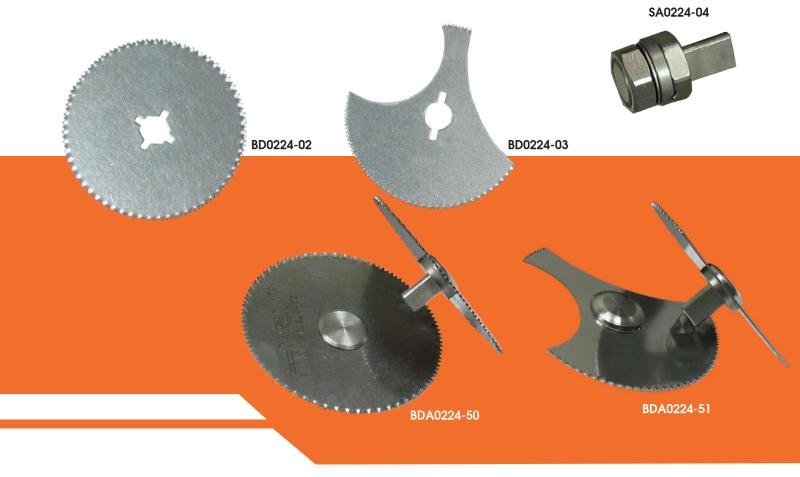

AUTOPSY SAW BLADE ARBOR

Order No.	Description
SA0224-04	Standard Saw Arbor

AUTOPSY SAW BLADE WITH ARBOR

<u>Order No.</u>	<u>Description</u>
BDA0224-50	
BDA0224-51	2.5 in./6 cm. Section Blade w/arbor attached

AUTOPSY SAW BLADE WITH OUT ARBOR

Order No.	Description
BD0224-02	
BD0224-03	

All attached arbors are permanent All measurements in inches/centimeters

Looking to add a new Autopsy Saw



Call for More Information (800) 410-0100

AUTOPSY SAW BLADES

NYLON BIOPSY BAGS

LABORATORY & PREP ROOM ACCESSORIES

<u>PREMIUM</u>

SMA	LL B	AGS
------------	------	-----

<u>Older NO</u>	
BBS1000-01	Small Bags/1000 per box
Width:	1.1 in./30 mm.
Lenath:	1.9 in./50 mm.

MEDIUM BAGS

<u>Oldel No</u>	UIZC	(Description)
BBM200-01	Medium Bags	/200 per box
Width:	1.	7 in./45 mm.
Longth:	2	0 in /75 mm

FLAP MESH Previous 200m Shavard 190m Swall NVI ON BIOPSY RAG





STANDARD

SMALL BAGS

<u>Order No</u>	Size (Description)
BBS1000-02	Small Bags/1000 per box
	1.1 in./ <mark>30 mm</mark> .
Length:	1.9 in./50 mm.

MEDIUM BAGS

Order No	Size	(Description)
BBM200-02	Medium Bags/	200 per box
Lengin		7 111.// 0 111111.

LARGE BAGS

Order No	Size (Description)
BBL500-02	Large Bags/500 per box
Width:	
Lenath:	

- Reduce risk of small specimen loss
- Design allows unrestricted fluid movement around tissue
- Bags peel open for quick and easy specimen removal
- Available in Standard & Premium
- Available in three sizes

Save money by placing one or two year open purchase orders and receive shipments monthly.









NYLON BIOPSY BAGS

LW106S

LW102

LW176

LW175

STAINLESS STEEL PANS

All stainless steel, seamless construction, coved corners for easy cleaning and covers have recessed strap handles for ease in handling and storing.

Available in standard or heavy weight construction.

Standard Weight: 22 gauge stainless steel

LW100
LW102 20.75/ 52 x 12.75/32 x 6/15
LW106SSolid Cover for above trays

LW100

LW101

INSTRUMENT TRAY

<u> Order 1</u>	<u> 10 </u>	Size	$(L \times W \times D)$
LW175	20.75/5	2 x 6.4375/	16 x 2.5/6
LW176	(Cover for al	oove trays
LW170	10.3/2	6 X 6.4375/	16 x 2.5/6
	10.3/2		
LW173	(Cover for al	oove trays

All measurements in inches/

LW173

LW170

LW171

STAINLESS STEEL LABORATORY PANS & TRAYS

STAINLESS STEEL STERILIZATION TRAYS



ALL SETS INCLUDES SOLID TRAY, PERFORATED TRAY AND COVER



SEE SECTION 1 FOR ALL YOUR LABORATORY INSTRUMENTS NEEDS



Call for more information (800) 410-0100

INSTRUMENT STERILIZATION TRAYS SETS

Can be used for either hot or cold sterilization. Set includes solid tray, perforated tray and cover.

Order N	No Size $(L \times W \times D)$
LW190	20.75/52 x 12.75/32 x 4/10
LW191	20.75/52 x 12.75/32 x 6/15
LW192	12.75/ <mark>52</mark> x 10.375/ <mark>26</mark> x 2.5/ <mark>6</mark>
LW193	12.75/52 x 10.375/26 x 4/10
IW194	

All measurements in inches/centimeters





Attached rings for easy storage with a vented stem.

FUNNELS

<u>Order</u>	No S	ize	<u>[DIA x</u>	<u>(H)</u>
LW235	3/ <mark>7</mark> x 3.75/	9, 2	.375	OZ.
LW236	4.125/ <u>10</u> x 4.875/ <u>1</u>	2, 6	.375	OZ.
LW237	5.125/13 x 5.625/	14,	13.0	OZ.
LW238	7/17 x 8.375/	21,	32.0	OZ.
LW239	8.375/ <mark>21</mark> x 9.5/	24,	64.0	OZ.

GRIFFIN STYLE BEAKERS

Smooth finish for easy cleaning and has a pour spout

Order N	No Size (DIA x H)
LW215	2.625/6 x 3.25/8, 250 ml.
LW216	
LW217	4.125/10 x 6.125/15, 1200 ml.
IW218	4.875/12 x 7.125/18, 2000 ml.

STORAGE CONTAINERS w/COVERS

Smooth finish for easy cleaning and No pour spout.

Order No	Size (DIA x H)
LW200	. 4.5625/11 x 5.75/14, 1.25 qt.
	Cover for above
LW202 5	.375/13 x 6.625/16, 2.0625 qt.
LW203	Cover for above
LW204	6.5/ <mark>16</mark> x 7/17, 3.1875 qt.
	Cover for above
	. 7.375/ <mark>18</mark> x 7.875/ <mark>20</mark> , 4.25 qt.
LW207	Cover for above

GRADUATED MEASURES

Graduated in ounces and cc's with an easy pour spout.

Order 1	No S	ize (DIA	(<u>H x H</u>
LW225	3.75/ 9 x 4.62	5/11, 1	6 oz.
LW226	4.75/12 x 5.2	5/13, 3	2 oz.
LW227	5.5/13 x 6.	5/16, 6	4 oz.

All measurements in inches/centimeters

STAINLESS STEEL FUNNELS, STORAGE CONTAINERS, BEAKERS & MEASURES



Order No Size (DIA x H)
LW2301/2 x 4/9, Base dia.: 2.76
LW2312.25/5 x 4.5/11, Base dia.: 3.625
LW2322.25/5 x 4.5/11, Base dia.: 3.6875

STAINLESS STEEL FOOTSTOOL Model LW396

Width:	11.375 in./28 c	m
Length: .	14.25 in./ <mark>36 c</mark>	m
Height:	9 in./ <mark>22</mark> c	m

- Stainless steel construction designed for rugged use
- Flared legs with non-slip rubber tips
- Non slip rubber top provides firm support without slipping

STAINLESS STEEL

Stainless Steel Pail is tapered, and "ears" for handles are an integral part of this pail, resisting break off and allowing for easy cleaning.

DRAIN PAIL w/STAND

Order No	Size (DIA x H)
LW250	11.625/ <mark>29</mark> x 9.25/ <mark>23</mark>
	13 qt. pail only
LW251	11.75/ <mark>29</mark> x 10.125/ <mark>25</mark>
	16 qt. pail only
LW253	Stand for pails
LW254	Drain pail lid

PLASTIC DRAIN BUCKET

14 qt. rugged, injection-molded bucket, resists most acids, alkalies, paint, chemicals and cleaning compounds. Graduated in pts.; qts.; gallons and liters. Gray buckets meet FDA standards.

Order No	Size (DIA x H)
LW252	12.375/ <mark>31</mark> x 11.375/28
	14 at pail only

All measurements in inches/centimeters



MARK IV EMBALMING MACHINES

Both units are equipped with a state of the art magnetic drive high speed pump. The embalming machines have an automatic shut off when fluids run out. The cabinets are durable and hoses come standard with a quick disconnect assembly. They include a full 2 year warranty.

STANDARD DESIGN FEATURES

	12 in./ <mark>30 cm</mark> .
Depth:	12 in./ <mark>30 cm</mark> .
Heiaht [.]	22.5 in /57 cm

- High pressure 0-60 lbs.
- Flow rate 0-1 gpm
 2.5 gallon/9.46 liter glass fluid jar capacity
- Powerful high speed 1/6 hp quiet motor
- Solid state lining pulsator
- 110 volt

MARK V EMBALMING MACHINES STANDARD DESIGN FEATURES

Width:	14 in./ <mark>35 cm</mark> .
Depth:	14 in./35 cm.
Height:	24.5 in./ <mark>62 cm</mark> .

- High pressure 0-80 lbs.
- Flow rate 0-1 gpm 3.5 gallon/13.25 liter glass fluid jar capacity
- Powerful high speed 1/5 hp quiet motor
- Solid state lining pulsator
- 110 volt



Call for more information (800) 410-0100

Mark IV & Mark V Export Model

 $\sim 220 \text{V}/50 \text{Hz}/1 \text{ph}$ alternating current

MARK IV & MARK V EMBALMING MACHINES

12



MODEL M0814



MODEL M300

ASPIRATOR STAND Model M0814

- 3 in./7 cm. caster
- Height: 34.5 in./87 cm.

width at top (overall): 15 in./38 cm. x 9.875 in./25 cm.

width at base (overall):

16.75 in./42 cm. x 17.75 in./45 cm. shelf: 11.625 in./29 cm. x 8.5 in./21 cm. drawer: 9.625 in./24 cm. x 9 in./22 cm.

x 2.875 in./7 cm.

Products are subject to be discontinued and features may change

PORTABLE ELECTRIC **ASPIRATORS**

PORTABLE ASPIRATORS

Designed to provide suction that is available when you need it. These units are engineered to supply high performance suction capability at a moment's notice. Model 300 has a Lumitone® enamel finish with an attractive high impact, fire retardant base.

Model M300

This lightweight powerful diaphragm pump unit is designed for general suction use.

- 1/8 horsepower motor creates up to
- 22 in./55 cm. Hg vacuum
 Includes a regulating suction gauge valve
- Compact for easy storageUL listed and includes a hospital grade plug 600 ml glass bottle or 1100 ml
- disposable canister
- Filter to help prevent fluid and aerosol contamination



HEAVY DUTY BODY BAG Model LW371E

- 36/91 x 90/228
- So/91 x 90/220
 Made from 20 mil black vinyl
 Inside vinyl liner guarantees no leaks
 Envelope style zipper with 2 pulls
 6 carry handles with
- scrim reinforcement
- Tested to carry over 600 lbs.3 identity tags included
- Colors include: Black, Blue, Red, Yellow

INFANT BODY BAG Model LW375

- 18/45 x 28/71
- Made from 8 mil white vinyl Envelope style zipper 3 identity tags included

ADOLESCENT BODY BAG Model LW374

- 31/78 x 49/124Made from 8 mil white vinyl
- Envelope style zipper3 identity tags included

STANDARD BODY BAG Model LW372E

- 36/91 x 90/228
 Made from 8 mil white vinyl
 Envelope style zipper
- 3 identity tags included

All measurements in inches/centimeters

BODY BAGS

14 (626) 334-1471

PLASTIC MORTUARY UNDERGARMENTS

LABORATORY & PREP ROOM ACCESSORIES

Plastic undergarments provide a solution to your dressing problems. Dressing a body for viewing preventing fumes and body damages from getting out of control. Plastic undergarments are quickly donned with no instructions needed.

Their elastic waist and cuffs prevent seeping and the generous sizing allows for Webril or cotton to be inserted beneath the plastic garments for extra leak protection. Mortech offers sizes S - XL for most items

Plastic Undergarments

Order No	Size Description
MU70	S - XXL, Unionalls
CPJ801	L - XL only, Shirt/Jacke
M201	S - XL, Pants
	S - XL, Capri Pants
A301	S - XL, Coveralls
MU402	S - XL, Stockings
MS502	S - L, Sleeves
U701	One size, Infant Unionalls





SLEEVES

INFANT UNIONALLS









ADULT UNIONALLS



HAZARDOUS WASTE HAMPER Model LW395

- Model LW395
 Designed specifically for use in mortuaries, coroner's facilities, and hospitals
 Designed for quick and easy cleaning
 Durable chrome plated frame
 Metal, foot-pedal operated lid
 Soft rubber casters (two locking)
 Vinyl pouch for bag storage
 Vinyl-coated ring to hold bag in place
 Fits 18 in./strans reusable hamper bags or 33 gallon/124 lites
 disposable bags

RED INFECTIOUS WASTE LINERS

Order No.		Description
NON152426	10-Gallon, 1.	5 mil, 200/case
NON153044	30-Gallon, 1.5	5 mil, 100/case
NON153143	33-Gallon, 1.	5 mil, 250/case
	40-Gallon, 1.	
	33-Gallon, 3	
' NON304046	10-Gallon	3 mil 50/case

YELLOW INFECTIOUS WASTE LINERS

Order No.		D€	<u>escription</u>
NON024042	33-Gallon,	1.2 mil,	100/case
NON024046	44-Gallon,	1.5 mil,	100/case

HAZARDOUS WASTE HAMPER & LINERS

16 (626) 334-1471





HEAD REST

RAISED BODY BOARDS

HEAD REST & RAISED BODY SUPPORTS

RAISED BODY BOARDS Model LW392

STANDARD DESIGN FEATURES

 Width:
 3 in./7 cm.

 Length:
 21.75 in./55 cm.

 Thickness:
 1.5 in./4 cm.

- Machined from a solid piece of high density polyethylene
 Boards raise the body above the work surface allowing for added
- fluid drainage Non-skid rubber feet are placed where contact is made with the work surface
- Sold as Set of (3)

HEAD REST - WHITE Model LW390

- Molded from chemical resistant plastic
- Adjustable up to six positions
- Reusable and easily cleaned with soap and water
- Wider base legs allow for more table contact for added stability and less slippage.Economically priced

HEAD REST - ALUMINUM Model LW390-A

- Machined from solid aluminum
- Heavy, stable and sturdy Adjustable up to six positions
- Can be cleaned with soap and water

HEAD REST - BLACK Model LW390-B

• Molded from chemical resistant plastic

BORATORY & PREP ROO

- Adjustable up to six positions
- Reusable and easily cleaned with soap and water
- Wider base legs allow for more table contact for added stability and less slippage.

All measurements in inches/centimeters

411 North Aerojet Avenue Azusa, CA 91702 www.mortechmfg.com



NITRILE EXAM GLOVES HEAVY DUTY

Heavy duty nitrile gloves provide maximum protection with an extended cuff and 8 mil thickness.

Order No.	Size
MN852HD	Small
MN852HD	
MN853HD	Large
MN854HD	X-Large
50/box. 10 boxes/case	•

STANDARD DESIGN FEATURES

- Offers protection from unwanted and dangerous substances
- Beaded cuff ensures easy donning and prevent roll down
- Superior strength with better puncture resistance
- Full textured enhances wet and dry grip.
- Thinner gauge improves tactile sensitivity
 Custom design enhances comfort and fit
- Provides an alternative solution for individuals who are allergic to natural rubber latex



NITRILE EXAM GLOVES

Premium nitrile gloves give excellent protection and a high chemical resistance. 100% nitrile construction eliminates the risk of latex protein allergies.

Order No.	Size
MN851	Small
MN852 Me	
MN853	Large
MN854X-	Large
100/box, 10 boxes/case	-

STANDARD DESIGN FEATURES

- Powder free, blue
- 9.5 in./ 24 cm. length, 5.5 mil (palm)
- Medical/exam grade
- Additional thickness for added protection
- 510K / Approved for medical use

LATEX GLOVES

The silky smooth finish of this powder free latex exam glove offers enhanced tactile sensitivity while still providing an excellent grip.

Order No.	<u>Size</u>
ML971	Small
ML972	
ML973	Large
ML974	X-Large
100/box 10 boxes/case	_

STANDARD DESIGN FEATURES

- Powder free natural color
- 9.5 in./24 cm. length, 5.0 mil (palm)
- Medical/exam grade
- 510K / Approved for medical use



- Fits most glove boxes 304 Stainless steel

- Comes in 3 sizes 1 box, 2 box, or 3 box



NITRILE Examination Gio

EASILY MOUNT TO ALMOST ANY UNIT



PALLBEARER GLOVES Model M-PBGWH

- One size fits allAll cotton-whitePriced per dozen pairs



DISSECTING BOARDS & RAISED DISSECTING PLATFORMS

PHOTO BLUE DISSECTING BOARD Model LW389

Width: 20 in./50 cm. **Length:** 15 in./38 cm.



RAISED DISSECTION DISSECTION NO. 12 P. LEGS Model LW379

STANDARD DESIGN FEATURES

LABORATORY & PREP ROOM

Height:	4 in./10 cm.
Width:	20 in./50 cm.
Length:	15 in./38 cm.
Thickness:	0.75 in./1 cm.
Board height (3" led	

- Manufactured from high density polyethylene
- Comes with 3 in./7 cm. legs
 Provides an excellent cutting surface
- · Color is white

All measurements in inches/centimeters





DISSECTING BOARDS Model LW385

LW385

LW387

Width:	18 in./45 cm.
Length:	24 in./60 cm.
Thickness:	0.75 in./2 cm.

LW386

- Manufactured from high density polyethylene with textured finish
- Textured surface provides an excellent cutting surface
- Bottom corners have a non-skid rubber foot attached
- · Color is white

Model LW386

Width:			
Length:	12	in./30	cm.
Thickness:	0.7	5 in./2	cm.

Model LW387

Width:	20 in./ <mark>50 cm</mark>
Length:	15 in./ <mark>38 cm</mark>
Thickness:	0.75 in./2 cm

RAISED DISSECTING PLATFORM Model LW380

Model LW380

STANDARD DESIGN FEATURES

Width:	
Length:	24 in./60 cm
Height:	15.6 in./40 cm

RAISED DISSECTING PLATFORM

- All polished stainless steel construction
- Heavy gauge material provides a very stable work surface
- Tray creased toward center drain
- Drain has optional hose attachment to Route flow to desired location
- Suitable for over the body placement.Polyethylene dissecting board (optional)
- Custom heights available

RAISED DISSECTING BOARD w/ADJUSABLE LEGS

Model LW379A



STAINLESS DRAIN BOARD

- All stainless steel construction
- · Fits onto most sink stations or grossing stations
 • Angled to sink for drainage

Model LW382

ANGING AUTOPSY SCALES





STANDARD DESIGN FEATURES

Digital Display:...8.8 x 3.8 in./20 x 8 cm. Diameter (Scale):.....15.875 in./40 cm. **Depth:**.....3.4875 in./12 cm. **Diameter (Pan):**.....13.7 in./35 cm. **Depth:** 4.4 in./11 cm.

- Solar Powered
- 30 lb x 0.02 lb / 15 kg x 0.01 kg
- Automatic zero tracking

DIGITAL AUTOPSY SCALE Model LW415 STANDARD DESIGN FEATURES

Digital Display:.....1 in./2.5 cm. **Diameter (Scale):**.........4.72 x 7.25 in./12 x 18 cm. **Depth:**.....2.25 in./12 cm.

- **Diameter (Pan):** 12 in./30 cm. **Depth:** 4.4 in./11 cm.
- Digital Functionality
- Large display
- Automatic power save
- Hold function
- Auto Zero tracking

DOUBLE DIAL HANGING AUTOPSY SCALE Model 1309DDAS Model 1315DDAS

STANDARD DESIGN FEATURES

Diameter (Scale):..... 15.875 in./40 cm. **Depth:** 3.4875 in./12 cm.

Diameter (Pan):.....14.5 in./36 cm. **Depth:**.....5 in./12 cm.

All units include Bow, Ring and Pan.

Replacements available. Call Us @ (800) 410-0100

All measurements in inches/centimeters

















SCALE POLE & BRACKET FOR SINK STATION Model LW410

STANDARD DESIGN FEATURES

- Length 44 in./111 cm
- Pole is fabricated from type 304 polished stainless steel with .120 in./304 cm. wall thickness
- · Welding is of the heliarc method and all welds are polished to match adjoining surfaces
- Stainless steel support is welded to vertical and horizontal bars for added strength
- A location for scale attachment is provided
- Pole bracket is custom fabricated from .375 in./<mark>.95 cm. thick Type</mark> 304 polished stainless steel
- Locking knob which allows the pole to be secured anywhere along its 360 degree turning ability is provided

SCALE POLE & BRACKET FOR PEDESTAL AUTOPSY TABLE Model LW411

STANDARD DESIGN FEATURES

- Length 72 in./182 cm
- Pole is fabricated from type 304 polished stainless steel with 120 in./304 cm. wall thickness
- Welding is of the heliarc method and all welds are polished to match adjoining surfaces
- Stainless steel support is welded to vertical and horizontal bars for added strength
- A location for scale attachment is provided
- Pole bracket is custom fabricated from .375 in./.<mark>95 cm. thick Type</mark> 304 polished stainless steel
- Locking knob which allows the pole to be secured anywhere along its 360 degree turning ability is provided

SCALE POLE & BRACKET FOR WALL MOUNT Model LW412

STANDARD DESIGN FEATURES STANDARD DESIGN FEATURES Length determined by location • Portable scale hanger with

- Pole is fabricated from type 304 polished stainless steel with .120 in./304 cm. wall thickness
- Welding is of the heliarc method and all welds are polished to match adjoining surfaces
- Stainless steel supports are welded to vertical & horizontal bars for added strength
- A location for scale attachment is provided
- Pole bracket is custom fabricated from .375 in. /.95 cm. thick Type 304 polished stainless steel
- Locking knob which allows the pole to be secured anywhere along its 360 degree turning ability is provided

- - steel base Stationary pole secured to base
- Length 72 in./182 cm.
- 3 in./7 cm. swivel casters (2) locking, (2) non locking

All measurements in inches/centimeters

SCALE POLES & BRACKETS

LABORATORY & PREP ROOM ACCESSORIES PREMIUM PLATFORM SCALES Model LW419 All measurements in inches/centimeters Capacity: 2200 gramsDimensions: 3.94/10 x 13.93/35 Products are subject to be discontinued and features may change x 9.05/ Readability: 0.1 g Pan Size: 7.7/20 x 6.9/18 Multiple Weighing Units Multiple Application Modes Easy to Use Included RS232 Interface – Allows data connection to PC LW419 or printer AC adapter included GLP/GMP Data – capabilities including date, time, balance serial number, user ID/project 0.00 ID, and results Print Dave Cal One year warranty ECONOMY PLATFORM SCALE Model LW425 Capacity: 2000 gramsPlatform: 6/15.24 diameter 4 diameter Gram / Ib / oz weighing modes, (1 gram / .03 oz readability) (1 gram / .03 oz readability) • Battery or AC Power • Easily portable, tare function One year warranty PLATFORM SCALE Model LW418 Capacity: 2200 grams Platform pan: 5.5/14 X 6.7/17 Gram / Ib / oz weighing modes, (Readability: 0.1 gram / .003 oz) Multiple Weighing Units Easy to Use USB or RS232 Connectivity Easy to Clean Battery or AC Power One year warranty • One year warranty LW418 LW425



DIGITAL WASHDOWN PLATFORM SCALE Model LW430-WBS

The washdown base provides a durable and high performance weighing package that is hard to beat. Equipped with a removable stainless cover to enable easy wipe down of the all-stainless exterior.

STANDARD DESIGN FEATURES

Width:	9.9 in./ <mark>25 cm</mark> .
Length:	11.4 in./ <mark>29 cm</mark> .
Height:	5.3 in./13.4 cm.

Capacity:......300.0 x 0.1 oz./ 15000 x Readability:......30 kg. x

- Compact and easy to useIP68 water and dust resistantStainless steel finish
- Removable weigh pan easy cleaning
 LED display
- AC adapter included
- HACCP compliant
 NTEP CC 10-068, Class III 3,000 d Measurement Canada AM-5794, Class III 3,000d
- One-year Limited Warranty

DIGITAL INFANT SCALE Model LW431

STANDARD DESIGN FEATURES

TRAY DIMENSIONS

wiain: .	∠U.O	II 1./00	CIII.
Depth:.	 10.5	in./27	cm.

SCALE DIMENSIONS

Width:	9.75	in./25	cm.
Depth:	11.3	in./29	cm.
Halaht		In /10	

Capacity:..... 44 lbs. x 0.5 oz./ 20 kg Readability:...... 0.1 oz./0

This infant scale provides digital readout in pounds/ounces or kilograms/grams.
Collapsible tray for storage/ transport. The removable white molded plastic tray has raised sides for enhanced safety and is easy to wipe clean.

All measurements in inches/centimete



LABORATORY

PREP ROO

DIGITAL INFANT SCALE

FLOOR SCALES

Scales feature rugged, wash-down digital indicators with easy to operate functions. Recessed pit installations allow for autopsy carriers to roll easily on the scale platform for weighing. Each scale includes: (1) ramp, or recessed pit frame, designated upon order.

STANDARD DESIGN FEATURES

- Rugged design for heavy duty use(4) Sensortronics load cells with 100% ènd loading
- Available in mild steel, epoxy coated stainless st<u>eel</u>
- 20 feet/6 of cable to digital indicator
- Installation options: 1) Mount off floor surface with ramp access 2) Mount in recess pit for level floor access
- Digital Indicator with necessary functions housed in water tight NEMA 4X enclosure
- All scales are 3.5in./9cm. height

Access Ramps

Provide easy transition onto the Floor Scale. Bolt to the floor, with built-in mounting plates that attach to the scale feet.

48 in. X 60 in. FLOOR SCALES EPOXY COATED STEEL Model LW450

Width:	48 in./121	
Length:		
Height:	3.5 in./8	

Capacity: 5,000 lbs. X 1 lbs.
 Weight in kilograms: 2272 kg. X 2kg.

STAINLESS STEEL Model LW452

Width: 48 in./1:		
Length: 60 in./18		
Height: 3.5 in.	./8 c	m

Capacity: 5,000 lbs. X 1 lbs. Weight in kilograms: 2272 kg. X 2kg.

48 in. X 72 in. FLOOR SCALES

EPOXY COATED STEEL Model LW455

Width:	48 in./121 cm.
Length:	72 in./182 cm.
Height:	3.5 in./8 cm.

Capacity: 5,000 lbs. X 1 lbs. Weight in kilograms: 2272 kg. X 2kg.

STAINLESS STEEL Model LW457

Width:	48 in./121	cm.
Length:	72 in./182	cm.
Height:	3.5 in./8	cm.

Capacity: 5,000 lbs. X 1 lbs. Weight in kilograms: 2272 kg. X 2kg.

All measurements in inches/centimeters+-

FLOOR SCALES

STANDARD INDICATOR



FLOOR SCALE W/ACCESS RAMP



SMART CLEAN EASY LIFT FLOOR SCALES

As easy to lift as the hood on your car, the quick clean floor scale provides an efficient mechanism for busy cleanup personnel.

The scale features a rugged washdown design, including 304 stainless steel construction and four stainless steel, welded seal, shear beam load cells. Adjustable support feet provide superior accuracy and repeatability by accommodating side impacts and decreasing extraneous forces on the load cell.

STANDARD DESIGN FEATURES

- Rugged washdown design Smooth, 304 stainless steel top deck Four stainless steel, welded seal, shear beam load cells
 Rigid 304 stainless steel tube frame
 Remote EL604 stainless steel NEMA 4X
- junction box
- Four adjustable stainless steel sure foot support feet
 20 ft of SURVIVOR EL147HE hostile
- environment load cell cable Manual drop-in-place safety bar
- 3/16" thick top plate

48 in. X 60 in. FLOOR SCALES

STAINLESS STEEL Model LW453

Width: 48 in./121	
Length: 60 in./152	
Height:4.5 in./11	

Capacity: 5,000 lbs. X 1 lbs. Weight in kilograms: 2272 kg. X 2kg.

48 in. X 72 in. FLOOR SCALES

STAINLESS STEEL Model LW458

Width:		
Length:	72 in./1 <mark>82</mark>	
Height:	4.5 in./11	

Capacity: 5,000 lbs. X 1 lbs. Weight in kilograms: 2272 kg. X 2kg.



The rugged design incorporates 304 stainless steel construction and four welded seal load cells with Teflon® cable designed for high temperatures and washdown areas.

All measurements in inches/centimeters+-

SMART CLEA

411 North Aerojet Avenue Azusa, CA 91702 www.mortechmfg.com



MODEL SLALED

It is the most exciting revolution in It is the most exciting revolution in examination and procedure lighting. The SLALED uses the latest advances in state-of-the- art lighting technology to achieve incredible performance and unsurpassed value and energy efficiency. The SLALED provides 10% more illumination (45,000 lux / 4181 fc at 1 meter) than even the high performing SLA50. A 92 CRI rating produces very accurate color visibility, which is important for an accurate produces very accurate color visibility, which is important for an accurate diagnosis. With 10 times greater (20,000 hours) lamp life than traditional light source products, you will save more than \$1000 in bulb replacements alone. Additionally, the SLALED uses 70% less energy.

STANDARD DESIGN FEATURES

- 45,000 lux (4181 fc) at 1 meter 4300 K color temperature CRI (Color Rendering Index) of 92 3 LED modules with a 20,000-hour life
- Adjustable focus using center handle UL60601-1 / IEC 60601-1 / IEC60601-1-2 / IEC 60601-2-41; CAN/CSA C22.2 601-1
- M90 certified

 CE marked

 5-year limited warranty

 Assembled in USA

MODEL SLA100

Model SLA100- limitless rotation and the highest intensity in its class. Providing both amazing value and unparalleled aesthetics, Model SLA100 also boasts limitless rotation on ceiling mounts (a feature previously available only on O.R. type lights). Along with the highest intensity in its class, the Model SLA100 provides very smooth focus and superior maneuverability. A longer arm system ensures that the SLA100 can be positioned in the widest range of positions positioned in the widest range of positions possible.

STANDARD DESIGN FEATURES

- High intensity of 14,800 fc (160,000 lux) at 24 in./60 cm. and 5800 fc (63,000 lux) at 1 meter 3700° K color temperature offers
- natural and true coloring
 Uses three 35-watt quartz halogen
 bulbs each rated with a 2,000-hour
 bulb life. Bulbs wired in parallel for continuous operation Compact 20 in./51 or
- diameter light- head

L SLAUED & S RECALL

- Extremely smooth focus mechanism with center sterilizable handle
 360° limitless arm and mounting system rotation around vertical axes (on single ceiling models)
 Cool operation for long hours of use
 High CRI (Color Rendering Index) of 97
 120 volt standard; 100/240 volt models available

- models available
 UL 60601-1/ IEC 60601-2-41 Certified
 5 year warranty

All measurements in inches/

2-26

MODEL SLALED & SLA100 SURGICAL LIGHT

SUMMARY OF TECHNICAL DATA (SLALED)

• Illuminance: 45,000 lux (4181 fc) at 1 meter Color temperature: 4300 K

CRI (Color Rendering Index): 92

Diameter of lighthead: 20" (51 cm) 38 cm) Light field diameter: 13" - 15" (33 cm -

54" (137 cm) Depth of illumination:

Adjustable using center handle • Focusing: Number of LED modules:

• Light sources: Light Emitting Diodes (LED)

Rated life of LED lamp: 20,000 hours 63" (160 cm) max. Swivel radius of lamp housing - ceiling mounted:

Height movement of lamp housing

ceiling-mounted: 41" (104 cm) vertical movement Minimum ceiling height/maximum

8 ft./12 ft. (244 cm/366 cm) ceiling-height: 84 Watts Power:

 Mounting options: Single ceiling, double ceiling Total weight:

Floor version 43 lbs. (19.5 kg), single ceiling version 44 lbs. (19.9 kg)

Seismic calculations available:

UL60601-1 / IEC 60601-1 / IEC 60601-1-2 Certifications/approvals: / IEC 60601-2-4 CAN/CSA C22.2 601-1 M90 CE marked

Product warranty: 5-year parts and labor • Origin: Assembled in USA

Note: The optical data are nominal values based on measurements calculated according to UL/IEC performance standards at 120V

SUMMARY OF TECHNICAL DATA (SLA100)

Illuminance:* 63,000 lux (5800 fc) at 1 meter

Color temperature: **CRI**

35 W IRC, 12V, bi-pin Light sources (halogen):

Power: 133 Watts Total weight: 35 lbs. (floor-stand), 34 lbs. (single ceiling)

20" (51 cm) cm - 31 cm) Diameter of light-head:

Light field diameter: Depth of Illumination: 47" (119 cm)

Focusing: Adjustable by rotating center-handle 360° (limitless) on single ceiling models Rotation:

Sterilizable handle: Locks into position with one hand

Number of bulbs: 2,000 Rated life of halogen lamp:

Swivel radius of lamp housing-ceiling mounted: 63" (160 cm) max.* *

• Minimum ceiling height:

maximum ceiling height: 8 ft. / 12 ft. (244 cm / 366 cm)

Height movement of lamp housing-ceiling mounted: 41" (104 cm) vertical movement Mounting options: Single Ceiling, Double Céiling, Floor and Wall

Seismic calculations available:

Bulb change mechanism: Changes from top with Phillips screwdriver


Certifications/Approvals: IEC/UL 60601-1 / IEC 60601-2-41 / IEC/EN60601-1-2;

CAN/CSA C22.2 601-1 M90 certified

CE marked

Product warranty: 5-year parts and labor • Origin: Assembled in the USA

- * The optical data are at nominal values based on measurements done according to the UL/IEC performance
- * * With extension arm and spring arm extended from center of mount to center of head

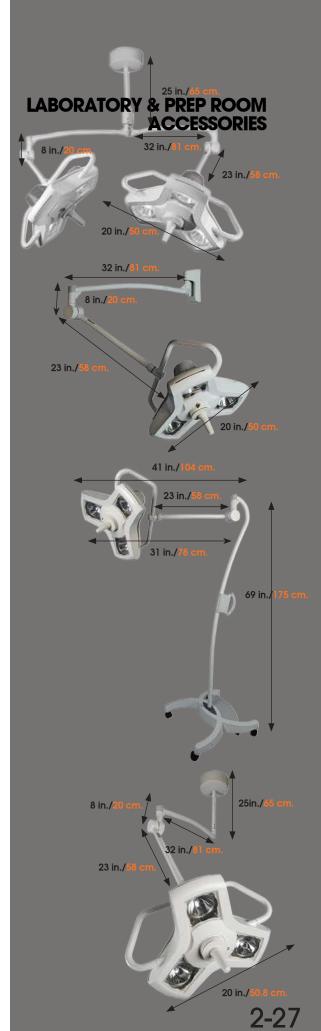



MODEL SLA50

The SLA50 provides both amazing illumination, unparalleled aesthetics and many more features that make it the right light for any procedure. With a Color Rendering Index (CRI) of 96, 45,000 Lux at 26 in 101 amazing and a color tomporature of 36 in./91 cm., and a color temperature of 3100° Kelvin, the SLA50 enhances your vision by allowing a true

rendition of colors. This light is ideal for long hours of use with three cool 50-watt quartz halogen bulbs (each) rated with a 2000/ hour average bulb life.

The SLA50 360° limitless arm and mounting system rotation around vertical axes on single ceiling models.

The SLA50 models carry floor-stand, single ceiling, double ceiling, and wall mount to meet different needs and installation requirements.

STANDARD DESIGN FEATURES

- Larger and Adjustable Light Pattern
- Multiple reflectors can be tilted by rotating the sterilizable light handle to adjust the size and pattern of the light
- to the working area

 Light Pattern Free of Cast Shadows

 Unique Y-Shaped design facilitates placement of the light-head around the physician's head minimizing the obstruction of light into the surgical field
- True Color Rendition

- Color temperature of 3100° K accents the color of tissue, providing a true restitution of color within the
- working area Color Rendering Index (CRI) of 96 provides a proper color representation Unlimited Rotation and
- Maximum Reach
- Limitless arm and mounting system rotation around vertical axes on single
- ceiling models

 Arm system provides a maximum reach of 60 in./152 cm. and diameter of 10 feet/
- Illuminate the patient from head to toe with no drift.
- 5-year warranty

All measurements in inches/centimeters+-

MODEL SLA50 SURGICAL LIGHT

411 North Aerojet Avenue Azusa, CA 91702 www.mortechmfg.com





SUMMARY OF TECHNICAL DATA

• Illuminance: *
• Color temperature: 3100 K • CRI 96
• Light sources (halogen): 50 W 12V bi-pin
Light sources (halogen):Power:184 Watts
• Total weight:
• Diameter of lighthead:
 Diameter of lighthead: 20" (51 cm) Light field diameter: 9.6" - 12" (25 cm - 31 cm) Depth of Illumination: 47" (119 cm)
• Depth of Illumination:
Focusing: Adjustable by rotating center handle
 Rotation: 360° (limitless) on single ceiling models Sterilizable handle: Locks into position with one hand
Number of bulbs: Number of bulbs:
Number of bulbs:Rated life of halogen lamp:2,000
• Swivel radius of lamp housing-ceiling mounted:
Minimum ceiling height/
maximum ceiling height:
Height movement of
lamp housing-ceiling mounted:41" (104 cm) vertical movement
Mounting options:
Seismic calculations available: Seismic calculations available:
 Bulb change mechanism:
CAN/CSA C22,2 601-1 M90 certified
CE marked
Product warranty: 5-year parts and labor
Assembled in the USA

* The optical data are at nominal values based on measurements done according to the UL/IEC performance standards at 120V * * With extension arm and spring arm extended from center of mount to center of head

All measurements in inches/centimeters +-

²⁵ in./65 cm.

8 in./20 cm.

23 in./58 cm.

20 in./50 cm.



MODEL SL7000

The surgical light is the industry leader for procedure lights. More physicians choose the SL7000 than any other procedure light for focusable flood-type light, maximum intensity and shadow-free operation. With minimal heat output and high color temperature, the SL7000 is the perfect low-maintenance, top performing light for nearly every application.

STANDARD DESIGN FEATURES

- 8000 footcandles (86,000 Lux) at 24 in./
- Focuses with central, removable handle
 Friction knob allows user to position self-balancing arm without a tool
 Color temperature of 3300° degrees K

- Shadow-free design
 Three 50 watt halogen bulbs, each with 5600 hr. average bulb life and wired in parallel to assure continuous operation

 • Drift-free, self-balancing arm

- Low-voltage operation minimizes electrical hazards
 Optional dimmer switch (wall)
 UL listed/ IEC 60601-2-41, CSA certified-mounting systems meet California Seismic codes
- 120V model standard; 230 / 240V models also availableFive year warranty

MODEL SL7000-LED

SL7000-LED This LED technology is a highly engineered optical system that delivers the precise controlled natural white light with . minimal heat, ideal for examinations.

SL7000-LED-TM w/Table Mount SL7000-LED-FS w/Floor Stand SL7000-LED-CM w/Ceiling Mount

MODEL SL10000

The aesthetically appealing surgical light offers incredibly pure, white light along with a guaranteed no-drift arm, high-intensity setting and variable spot size control. The SL10000 offers increasity of up to 60,000 lux (5574 fc) at 1 meter.

STANDARD DESIGN FEATURES

- Up to 13,000 footcandles (140,000 Lux) at 24 in./61 cm. and 5000 footcandles at 24 in./61 cm. and 5000 for (54,000 Lux) at 1 meter

 • Up to Color temperature of 4300° degrees K

- Variable spot size of 2 in.t-10 in./5-25 (
 Low-voltage 150 watt halogen bulb with 400 hour life
- Drift-free, self-balancing arm with
- friction knob

 UL listed/IEC 60601-2-41, CSA certifiedmounting systems meet California
- Seismic codes 120V model standard; 230 / 240V models also available
- Five year warranty





CEILING TRACK MOUNTING

Model M200470 (Single SL7000) Model M200472 (Double SL7000) Model M204370 (Single SL10000) Model M204372 (Double SL10000)

- 6 feet/1.8 meters standard length with custom lengths available
- One to four light heads can be mounted on each track-system can be easily changed to fit your needs

CEILING MOUNTING, STATIONARY Model M100540 (Single SL7000) Model M100550 (Double SL7000) Model M244322 (Single SL10000) Model M244332 (Double SL10000)

- Available for single or double light head applications
- Preferred for convenience and maneuverability, especially in busy facilities

WALL MOUNTING Model M100160 (SL7000) Model M244342 (SL10000)

- Easy to install and space maximizer
- Allows 45 in./114.3 cm. of arm extension

COMBINATION UNIT

Most lights can be mixed and matched to provide the exact lighting you require. For example, pictured is a SL7000 light to provide wide area lighting and a SL10000 to provide an intense spot light to a localized area.

Model MOC516CC (Double ceiling mount) Model MOC516CT (Track, dual head and single trolley)

MOBILE FLOOR STAND Model M100110 (SL7000) Model M244312 (SL10000)

- Unique "non-trip" design slides under table and assures mobility
- Includes foot switch, locking casters and cord wrap

DISPOSABLE LIGHT HANDLE COVER Model M8100PK

- A real time saver since it eliminates the need to autoclave the handles
- Packaged in lots of 25

All mounts are UL Listed and carry a (3) year warranty

SL7000-LED also compatible

All measurements in inches/centimeters +-

411 North Aerojet Avenue Azusa, CA 91702 www.mortechmfg.com

MODEL SELED

Super Exam® LED delivers superior super Exam® LED delivers superior illumination to a focused area. A combination of flexible drift-free positioning, excellent light output and LED energy-saving technology, the Super Exam® LED light is ideal for general examination.

Usability

- Flexible and precise covered spring-balanced arm is easy to position exactly where light
- The power and dimming switch is positioned near the handle for one-handed operation
- Easy access handle designed for quick positioning

Performance

- High performing energy efficient\ LED components are virtually maintenance free
- Recessed LED light source to reduce glare
- Fully dimmable for the perfect amount of light
- Industry leading 5-year warranty
- · Night light, low light output mode to prevent disturbing patients

Construction

- SteriTouch® coating inhibits the growth of bacteria
- Powder-coated metal construction for durability
- Light source covered with tempered glass
- Smooth surface design for easy wipe down with hospital-grade disinfectants













Dimming Feature

SteriTouch® Antimicrobial Powder Coating



Table Mount



SUMMARY OF TECHNICAL DATA

- Illuminance: 35,000 Lux (3251 fc) at 39.37" (100 cm.)
 Color Temperature: 4000 Kelvin
 CRI (Color Rendering Index): > 95
 Light Source: Light Emitting Diode (LED)
 Rated Life: 50,000-hour average LED life
 Power: 20 Watts
 Mounting Options: Single Ceiling Mount, Table Mount, Floor Stand and Wall Mount
 Applications: General examination
 Certifications/Approvals: ES 60601-1, IEC 60601-2-41, -1-6, EN 60601-1-2, CAN/CSA
 Product warranty: 5-year limited warranty

 Note: The optical data are nominal values based on measurements calculated according to UL/IEC performance standards at 120V

All measurements in inches/centimeters+-





LIGHTS

Magnifier LED Light

World class optics, performance and precision movement. The perfect combination of light quality, positionability and large viewing area. Featuring an arm and neck system that is rugged and flexible. It stays exactly where it's positioned and doesn't require tightening or lock mechanism adjustments.

All measurements in inches/centimeters

Standard Design Features

- Superb light quality; 90 CRI, 4000 Kelvin 10-100% dimming capability 3.5 diopter magnifying lens Powerful 22-" 21" bulb with 10,000-hour

- Powerful 22-wall bulb with 10,000-hour average bulb life
 6.5/100 mm diameter circular viewing area
 Quick start electronic ballast (flicker-free)
 Parallel motion, patented enclosed arm system
- Integral handles and cover for
- lens protection Smooth surface, easy to clean, anti-microbial coating

- Auto shut-off
 Low maintenance LED array
 Medical standards approved
 Available in Floor Stand and
 Wall/Table Models



MODEL WAVE® LED MAGNIFIER LIGHTS

WAVE LED Magnifier Light

The new Wave LED magnifier has a large viewing area and LED energy saving technology. Offered in a unique and powerful 3.5 diopter magnifier, the Wave LED is superior in both form and function. The dual independent LED light sources offer enhanced performance as well as a user controlled energy saving entitled. controlled energy saving option.

All measurements in inches/centimeters

Standard Design Features

- Shadow-free magnification using symmetrical lighting or 3-D magnification

- symmetrical lighting or 3-D magnification using asymmetrical magnification.
 Self-balancing shade and hands-free neck assembly make precise adjustments easy.
 45/114 articulating K-arm standard.
 6.75/17 x 4.5/12 rectangular white crown optical-quality glass lens.
 Equipped with two 6W individually controllable LED modules.
- Automatic 9/4 hour auto shut-off feature and (0-50-100%) step dimming to support
- energy savings.
 No driff spring-balanced arm allows complete freedom of movement.
 Standard table edge clamp mount

Optional accessories available:

- Surface mount bracket
- Weighted rolling floor stand

MODEL SL7000 with 2 ARM CEILING MOUNT

Comes with (2) adjustable arm with (1) Model SL700 surgical light, (1) articulating camera/video arm

SINGLE ARM CAMERA: CEILING MOUNT

Comes with (1) adjustable arm and (1) articulating camera/video arm

MODEL SL7000 STANDARD DESIGN FEATURES

- 8000 footcandles (86,000 Lux) at 24 in./

- Tocuses with central, removable handle
 Friction knob allows user to position self-balancing arm without a tool
 Color temperature of 3300° degrees K
 Shadow-free design
 Three 50 watt halogen bulbs, each with 5600 hr. average bulb life and wired in parallel to assure continuous operation parallel to assure continuous operation
 Driff-free, self-balancing arm
 Low-voltage operation minimizes
 electrical diagrams

- Optional dimmer switch (wall)
 UL listed, CSA certified- mounting systems meet California Seismic codes
 ~115v standard, ~230V available
 Five year warranty



SINGLE ARM CAMERA: CEILING MOUNT

- Friction knob allows user to position self-balancing arm without a tool for drift-free positioning
- Mounting systems meet California Seismic Codes
- 120V model standard; 230V models also available
- UL 60601-1/IEC 60601-2-41 certified
- 5-year warranty

VIDEO CAMERA MOUNT

The articulated arm has a large locking knob, variable friction and locking of arm obtained by adjusting the knob. Supplied with quick release camera plate with secondary safety lock based. Ideal for mounting a photographic or video camera exactly at the angle you need it. Fits any 5/8" female socket.

STANDARD DESIGN FEATURES

Arm length	19.3 / <mark>49 cm</mark> .
Arm tube diameters	0.8/ <mark>2 cm</mark> .
Attachment top	0.25/ <mark>0.6</mark> screw
Attachment by	
Color	black
Load capacity	
Material	aluminum

All measurements in inches/centimeters +-



MODEL SL7000 2 ARM CEILING MOUNT & SINGLE ARM CAMERA CEILING MOUNT

35 (626) 334-1471

BASE TABLE SPECS

TABLE TOP WORK SURFACE

30" column height 15.5/89 x 19.5/49 inch baseboard

STANDARD DESIGN FEATURES

Copy Stand with non-reflective matte gray with printed grid base board with inch/arm scale

- •Two light banks and two lamp arms
- Square cross section steel tube lamp arms
- Vertical lamp arms have height markings and are tilt/angle adjustable with lock joints
- Horizontal lamp arms are continuously height adjustable
- •Lights can be swiveled
- Die-cast clamp holders compatible with base boards 1.9 in/48 mm
- •DC operation for flicker-free light without residual ripple
- Removable diffusing cover
- •2 x 192 LED arrays
- •CRI > 85
- •Color temperature: 5600 Kelvin
- Power consumption: 2 x 15 watts
 LED angle of radiation: 60°

- Height adjustable camera arm. Column rotatable 180 Degree
- Approximately 2.7 in// cm adjustable horizontal distance of camera arm to
- 1/4" mounting thread
- Maximum load 3.3 pounds
- Suitable for use with smaller SLR cameras, digital cameras, CCD and CMOS camera

All measurements in inches/centimeters+-





411 North Aerojet Avenue Azusa, CA 91702 www.mortechmfg.com



PLASTIC UTILITY TRUCK

- High density polyethylene
- Corrosion résistant construction
- Shelves have a retaining lip on four sides to keep contents from falling off
- Large, easy glide 4/10 rubber wheel casters, 2 with brakes and 3 shelves
- Push handle eases maneuverability
- Lifetime Limited Warranty

Order No.	Dimensions
MWB252269GY	24"L x 18"W x 32.5"H
	61L x 46W x 83H
MWB334539GY	32"L x 24"W x 33"H
	81L x 61W x 83H

STAINLESS STEEL UTILITY CART

The Stainless Steel Utility Cart has many valuable functions both in the laboratory and morgue environments. It has the ability to transport all types of laboratory ware and can also be used as an instrument/ dissecting tray.

STANDARD DESIGN FEATURES

· · · · · · · · · · · · · · · · · · ·	
Order No.	<u>Dimensions</u>
MXA124-S5	24"L x 18"W x 35"H
	61L x 46W x 89H
MXA236-S5	36"L x 24"W x 35"H
	91L x 61W x 89H
MXA348-S5	48"L x 30"W x 35"H
	122L x 76W x 89H

- All welded construction (except casters)
- Stainless with premium #4 polished shelves in durable 16 gauge
- Bolt on casters, 2 swivel & 2 rigid, for superior tracking
- Tubular handle with smooth radius bend-standard
- 1.5/4 shelf lips up for retention
- Top shelf height-35/89
- Clearance between shelves 12/30

All measurements in inches/centimeters +-

37 (626) 334-1471



ideal storage addition to any morgue or laboratory environment.

All exposed hardware is brushed stainless steel. Hinges are thick stainless steel Laboratory/Hospital type, five knuckle frictionless and are long with fast pin and rounded ends.

All doors are provided with ball catch assembly for closing. Pulls are available in two styles, a satin chrome plated extended handle or a bar pull with a satin finish. Both are mounted to the inside head. When doors are supplied with a lock, the lock will be a removable core for enhanced security and quick rekeying. In cases of double doors, the left door will be fitted with an astragal.

STANDARD DESIGN FEATURES

- Overall cabinet measures: 27/68 L x 18/45 W x 32/81 H
- All stainless steel construction
- Four heavy duty swivel casters, 5/12 diameter
- Cylinder locks for all drawers and doors are optional
- Custom sizes available

All measurements in inches/centimeters +-

MOBILE UTILITY CABINETS

Fully Customize. Select all drawers, all doors or a mix of both.



TIRE STAND

Mobile cart with the capability to transport and store tires for your facility.

STANDARD DESIGN FEATURES

- Overall measures: 40/101 L x 40/101 W x 50/127 H
 All stainless steel construction
 Four heavy duty swivel casters, 6/15 diameter w/brakes

EVIDENCE CART W/SINGLE BASKET

STANDARD DESIGN FEATURES

- Working size: 30.625/77 L x 19.75/50 W x 35/88 Removable stainless steel basket

- Removable stainless steel basket
 Fold down 1" or stationery handle
 All Type 304 stainless steel construction
 and 14 gauge posts
 (2) Plastic corner bumper
 (2) 4/12 swivel casters, (2) 5/12 ridged
 All top edges are seamed to remove
 sharp edges and show a clean
 sanitary finish

EVIDENCE CART W/SINGLE BASKET & INSTRUMENT TRAY

STANDARD DESIGN FEATURES

- Excellent working size:
 30.625/** L x 19.75/** W x 35/** H
 Removable stainless steel basket
 Fold down 1" or stationery handle
 All Type 304 stainless steel construction and 14 gauge posts
 (2) Plastic corner bumper
 (2) 4/** swivel casters, (2) 5/** ridged
 All top edges are seamed to remove sharp edges and show a clean sanitary finish

EVIDENCE CARTS



7000 SERIES REACH-IN REFRIGERATOR 1, 2 & 3 SECTION Models 7001R, 7002R, 7003R

Cabinet interior is a milled finish aluminum and the cabinet exterior is a heavy gauge anodized aluminum with stainless steel door and hatch cover.

Models 7001R, 7001F

- Net Capacity (cu. ft.) 20 (566 cu l)
- Width, Överáll (in.) 26 (66 cm)
- Depth, Overall (in.) (incl. handle) 35.375 (90 cm)
- Depth [less door] (in.) 32 (81 cm)
- Depth [door open 90°] (in.)
 55.5 (141 cm)
- Clear Door Width (in.) 19.375 (49 cm)
- Clear Door Height (in.) 58.625 (149 cm)
- Height, Overall (in.) (incl. 5" casters)
 82.25 (209 cm)
- No. of Doors 1
- No. of Shelves 3
- Shelf Area (sq. ft.) 20.4 (1.9 sq m)
- Tray Slide Capacity 24

Models 7002R, 7002F

- Net Capacity (cu. ft.) 48 (1359 cu l)
- Width, Overall (in.) 52 (132 cm)
 Double Overall (in.) (in.) (in.)
- Depth, Overall (in.) (incl. handles) 35.375 (90 cm)
- Depth (in.) (less doors) 32 (81 cm)
- Depth (in.) (doors open 90°) 55.5 (141 cm)
- Clear Door Width (in.) 19.375 (49 cm)
- Clear Door Height (in.) 58.625 (149 cm)
- Height, Overall (in.) (incl. 5" casters)
 82.25 (209 cm)
- No. of Doors 2
- No. of Shelves 6
- Shelf Area (sq. ft.) 40.8 (3.8 sq m)
- Tray Slide Capacity (per section) 24

Models 7003R, 7003F

- Net Capacity (cu. ft.) 70 (1982 cu l)
- Width, Överall (in.) 78 (198 cm)
- Depth, Overall (in.) (incl. handles) 35.375 (90 cm)
- Depth [less doors] (in.) 32 (81 cm)
- Depth [doors open 90°] (in.) 55.5 (141 cm)
- Clear Door Width (in.) 19.375 (49 cm)
- Clear Door Height (in.) 58.625 (149 cm)
- Height, Overall (in.) (incl. 5" casters) 82.25 (209 cm)
- No. of Doors 3
- No. of Shelves 9
- Shelf Area (sq. ft.) 61.2 (5.7 sq m)
- Tray Slide Capacity (per section) 24

All measurements in inches/centimeters

SERIES 7000 REACH-IN REFRIGERATORS

411 North Aerojet Avenue Azusa, CA 91702 www.mortechmfg.com



7000 SERIES REACH-IN FREEZERS 1, 2 & 3 SECTION Models 7001F, 7002F, 7003F

Cabinet interior is a milled finish aluminum and the cabinet exterior is a heavy gauge anodized aluminum with stainless steel door and hatch cover.

STANDARD DESIGN FEATURES

- Modern, state of the art styling
- Performance rated refrigeration system utilizing environmentally safe R-134a refrigerant
- 3 in./8 cm. non CFC polyurethane foam insulation
- Chrome plated flow line handles
- Cam-action lift off hinges
- Self closing doors Automatic interior lighting
- Magnetic snap in door gasket
- Cylinder lock in each door
- Automatic electric condensate evaporator
- 5 in./13 cm. casters
- Heavy duty, epoxy coated steel shelves External dial thermometer
- S/S front, aluminum end panels and interior
- Suffix SA (S/S exterior, aluminum interior)
- Suffix SS (S/S exterior and interior)

Cabinets are all metal, inside and out. In addition, all seams are closed and sealed, with metal edges turned away from the exposed surface. The result is an integrated structural frame. Internal corners are coverd to conform to NSF standards. Automatic interior lighting is controlled by a light switch concealed in the door hinge. The cabinet is supported on four 5 in./13 cm. casters.

Constructed of metal, freezer doors are self closing and fully insulated. Their cam lift hinges are epoxy coated and self lubricating. Hinges also have a safety stop that holds the door open, preventing overswing. The Chrome plated pull handles have built in cylinder locks. The full perimeter, magnetic vinyl gaskets are removable without the use of tools. Doors easily lift off, and have perimeters built in, low wattage, and anti condensate heater. Door openings are protected by an impact resistant, non conductive PVC breaker strip with no exposed screws or fastener.

Cabinet body, doors and evaporator coil housing are filled with pressure injected polyurethane foam for insulation.

Shelves have a runner spaced .75 in./2 cm. O.C. with (2) reinforcing bars 8.5 in./21 cm.

O.C. coated 7 mils of baked on gray epoxy. (3) wire shelves are standard per section.

The shelved have a saline spray corrosion resistance of 600 hours.

Shelves will support 250 lbs./113 kg. each. They are supported on stainless steel pilasters, and are adjustable on 1 in./2 cm. centers. All shelves are interchangeable and can be adjusted without tools or special parts.

The complete refrigeration assembly is mounted on top of the cabinet behind a removable hatch cover. Refrigeration components include a hermetically sealed compressor, cap tube, thermostatic temperature control, high humidity evaporator coil and hot gas condensate evaporator. The system is balanced to maintain 0°F average internal air temperature. Windrunner gradient air displacement process provides even air flow and temperature control throughout the cabinet. All components are factory installed and tested, and supplied with an attached cord and plug, master switch, and exterior dial thermometer.

All measurements in inches/centimeters

SERIES 7000 REACH-IN FREEZERS

41 (626) 334-1471