MANUFACTURING

AUTOPSY STATIONS

Manufacter and the second second

Canal I

Wall Mounted Autopsy Station, Sink Left	. 2-3
Wall Mounted Autopsy Station, Sink Right	. 4-5
Wall Mounted Autopsy Station, Sink Center	. 6-7
Adjustable Height Floor Mounted Autopsy Station Sink Center	
Wall Mounted Autopsy Station, Double Sink 1	0-11

EMBALMING STATIONS

Ventilated Embalming Station 1	2-13
Ventilated Embalming Table	14
Autopsy Station Accessories 1	5-19
Water Control Unit	20
Embalming Table Collector	21
Embalming Table Collection Station	22
Wall Mount Service Station	23
Stainless Embalming Station	24
Flush Embalming Station	25

SINK STATIONS

Multiples estimation

Re-

line al

SCRUB STATIONS

Single Scrub Station	26
Double Scrub Station	27
Triple Scrub Station	28
Quadruple Scrub Station	29
Single Scrub ADA Wash Station	30
Double Scrub ADA Wash Station	31
Triple Scrub ADA Wash Station	32
ADA Specifications	33
Wash Station	34
Wash Station with Cabinet	35
Mobile Wash Stations	36
Economy Style Stainless Steel Wash Station	37
One Drain Board Stainless Steel Scullery Sink	38
Two Drain Board Stainless Steel Scullery Sink	39

EMERGENCY STATIONS

Wall Mount Shower/Eyewash	40
Decontamination Sink & Spray Gun	41
Elevating Decontamination Sink	42

SINK STATIONS **MODEL 1036-7** WALL MOUNT AUTOPSY STATION, SINK LEFT



STANDARD DESIGN FEATURES

- All stainless steel construction with heliarc-welded seams and joints, ground and polished to a smooth finish
 Exhaust duct with 8 in./20 cm.

- Exhaust duct with 8 in./20 cm. X 10 in./25 cm. grill Full length specimen shelf (12 in./30 cm. wide x "length of the unit" Large radius on all inside corners for easy cleaning and required sanitation Large single-compartment sink with rapid and positive drainage Cart-to-sink locking mechanism with slide latch which can be accessed from either side of the carrier
- Large instrument drawer
- Large instrument drawer
 Plumbing and electrical lines are factory-installed and require only minimum installation
 GFCI duplex receptacle w/ waterproof cover
 Heavy-duty commercial waste disposer, 1/2 hp and switch
 Light fixture over the work area
 Deluxe aspirator with reverse flow for additional waste removal: "reverse


- additional waste removal: "reverse flow" feature instantly relieves suction clogging by providing a reverse pressure of water
- Hot and cold water fixture with convenient goose-neck faucet and wist blade handles

- Spray hose assembly with cold water control valve, nozzle and 10 ft./3 m. of flexible hose
- Dissecting area rinse assembly with cold water valve
- Complete back-siphon protection provided by reduced pressure principle assembly

Plumbing fixtures can be located in various positions depending on your desired work environment

All measurements in inches/centimeters +-



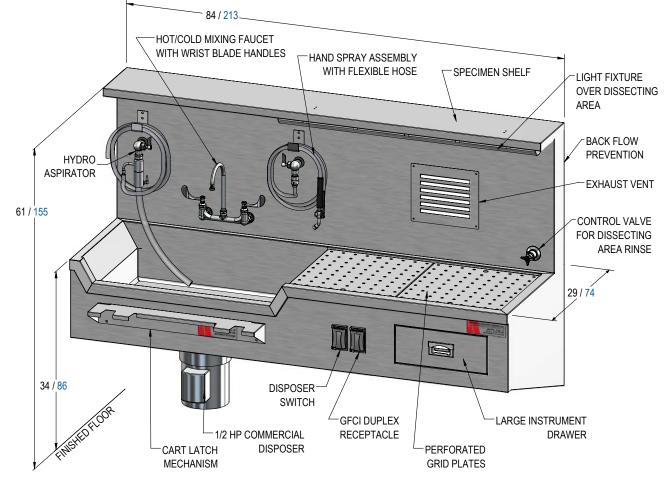

All measurements in inches/centimeters +-



HYDRO ASPIRATOR





SPRAY HOSE ASSEMBLY



CART LATCH w/ LOCKING MECHANISM

Optional Features & Accessories

See pages 3-13 to 3-17 for a full list of sink station accessories.

Options based on available space When planning an order, we will assist you in selecting options to complete your system. Please feel free to contact us.

Custom layout and designs are available.

411 North Aerojet Avenue Azusa, CA 91702 www.mortechmfg.com

SINK STATIONS **MODEL 1036-8** WALL MOUNT AUTOPSY STATION, SINK RIGHT



STANDARD DESIGN FEATURE


- All stainless steel construction with heliarc-welded seams and joints, ground and polished to a smooth finish
 Exhaust duct with 8 in./20 cm.

- X 10 in./25 cm. grill Full length specimen shelf (12 in./30 cm. wide x "length of the unit" Large radius on all inside corners for easy cleaning and required sanitation Large single-compartment sink with rapid and positive drainage
- Cart-to-sink locking mechanism with
- Carl-to-sink locking mechanism with slide latch which can be accessed from either side of the carrier
 Large instrument drawer
 Plumbing and electrical lines are factory-installed and require only minimum installation
- GFCI duplex receptacle w/ waterproof cover
- Heavy-duty commercial waste disposer, 1/2 hp and switch
 Light fixture over the work area
- Deluxe aspirator with reverse flow for additional waste removal: "reverse flow" feature instantly relieves suction clogging by providing a reverse pressure of water
- Hot and cold water fixture with convenient goose-neck faucet and wrist blade handles
- Spray hose assembly with cold water control valve, nozzle and 10 ft./3 m. of flexible hose
 Dissecting area rinse assembly with
- cold water valve
- Complete back-siphon protection provided by reduced pressure principle assembly

Plumbing fixtures can be located in various positions depending on your desired work environment

All measurements in inches/centimeters +-



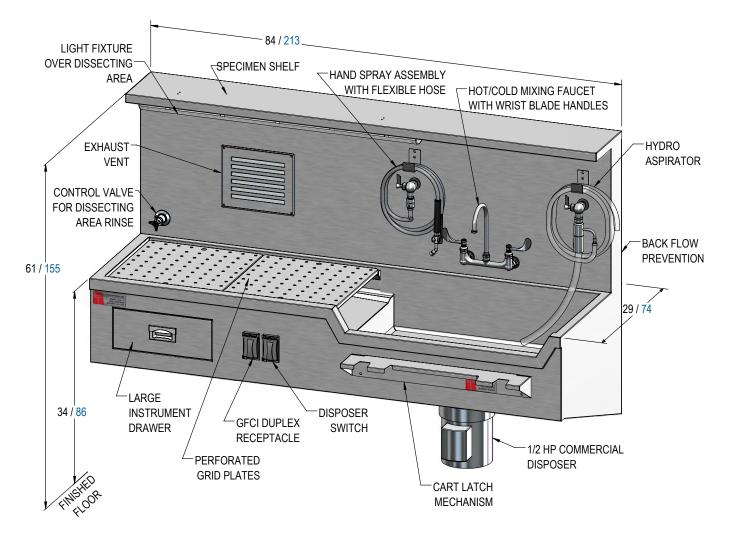



HYDRO ASPIRATOR





SPRAY HOSE ASSEMBLY

All measurements in inches/centimeters +-



CART LATCH w/ LOCKING MECHANISM

Optional Features & Accessories

See pages 3-13 to 3-17 for a full list of sink station accessories.


Options based on available space

When planning an order, we will assist you in selecting options to complete your system. Please feel free to contact us.

Custom layout and designs are available.



411 North Aerojet Avenue Azusa, CA 91702 www.mortechmfg.com

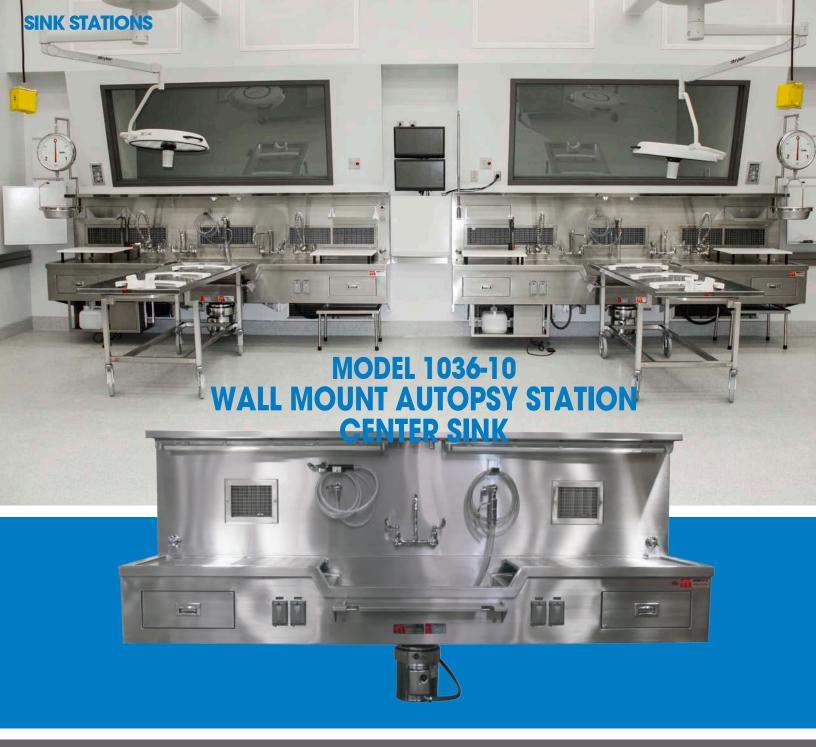

- All stainless steel construction with heliarc-welded seams and joints,
- heliarc-welded seams and joints, ground and polished to a smooth finish Exhaust duct with 8 in./20 cm. X 10 in./25 cm. grill Full length specimen shelf (12 in./30 cm. wide x "length of the unit" Large radius on all inside corners for easy cleaning and required sanitation Large single-compartment sink with rapid and positive drainage

- Cart-to-sink locking mechanism with
- Carl-to-sink locking mechanism with slide latch which can be accessed from either side of the carrier
 Large instrument drawers
 Plumbing and electrical lines are factory-installed and require only minimum installation
- GFCI duplex receptacle w/ waterproof cover
 Heavy-duty commercial waste disposer, 1/2 hp and switch
- Light fixtures over the work areas Deluxe aspirator with reverse flow for additional waste removal: "reverse flow" feature instantly relieves suction clogging by providing a reverse pressure of water

411 North Aerojet Avenue Azusa, CA 91702 www.mortechmfg.com


• Hot and cold water fixture with convenient goose-neck faucet and wist blade handles

- Spray hose assembly with cold water control valve, nozzle and 10 ft./3 m. of flexible hose
- Dissecting area rinse assemblies with
- Complete back-siphon protection provided by reduced pressure principle assembly

Plumbing fixtures can be located in various positions depending on your desired work environment

All measurements in inches/centimeters +-



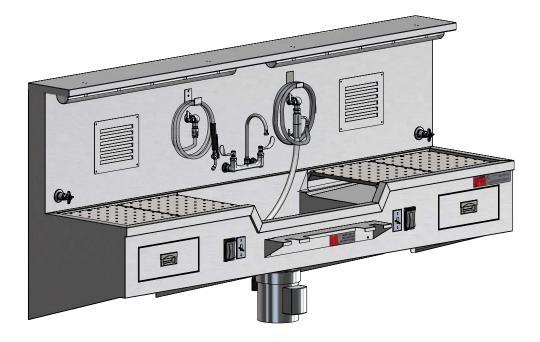

All measurements in inches/centimeters +-



HYDRO ASPIRATOR



SPRAY HOSE ASSEMBLY



CART LATCH w/ LOCKING MECHANISM



Optional Features & Accessories

See pages 3-13 to 3-17 for a full list of sink station accessories.

Options based on available space When planning an order, we will assist you in selecting options to complete your system. Please feel free to contact us.

Custom layout and designs are available.

411 North Aerojet Avenue Azusa, CA 91702 www.mortechmfg.com



MODEL 1036-10-A ADJUSTABLE HEIGHT FLOOR MOUNT AUTOPSY STATION CENTER SINK

STANDARD DESIGN FEATURES

Width:	29 in./74 cm.
Length:	114 in./290 cm.
Working Height:	32 in./81 cm. min.
	40 in./101 cm. max.


- Featuring electromechanical height adjustment All stainless steel construction with
- heliarc-welded seams and joints,
- ground and polished to a smooth finish Exhaust duct with 8 in./20 cm.
- X 10 in./25 cm. grill Full length specimen shelf (12 in./30 cm. wide x "length of the unit" Large radius on all inside corners for
- easy cleaning and required sanitation
- Large single-compartment sink with rapid and positive drainage

- Cart-to-sink locking mechanism with slide latch which can be accessed
- from either side of the carrier Large instrument drawers Plumbing and electrical lines are factory-installed and require only
- minimum installation GFCI duplex receptacle w/ waterproof cover
 Heavy-duty commercial waste disposer, 1/2 hp and switch
 Light fixtures over the work areas
 Deluxe aspirator with reverse flow for

- additional waste removal: "reverse flow" feature instantly relieves suction clogging by providing a reverse pressure of water
- Hot and cold water fixture with convenient goose-neck faucet and wrist blade handles
- Spray hose assembly with cold water control valve, nozzle and 10 ft./3 m. of flexible hose
- Dissecting area rinse assemblies with Complete back-siphon protection
- provided by reduced pressure principle assembly

Plumbing fixtures can be located in various positions depending on your desired work environment

All measurements in inches/centimeters +-

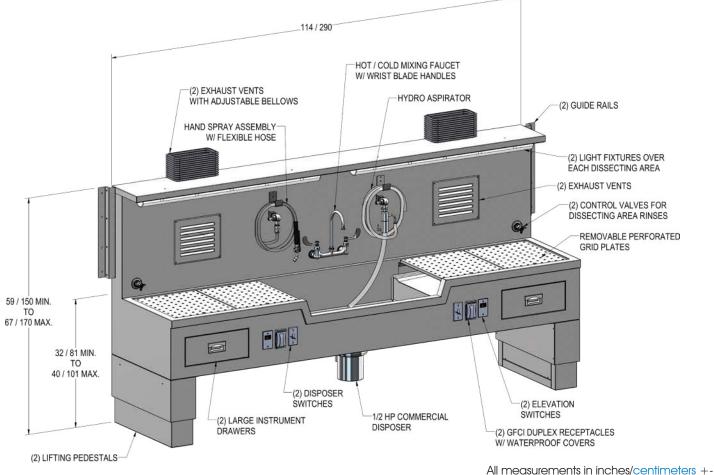



HYDRO ASPIRATOR





SPRAY HOSE ASSEMBLY

CART LATCH w/ LOCKING MECHANISM

Optional Features & Accessories See pages 3-13 to 3-17 for a full list of sink station

accessories.

Options based on available space

When planning an order, we will assist you in selecting options to complete your system. Please feel free to contact us.

Custom layout and designs are available.

411 North Aerojet Avenue Azusa, CA 91702 www.mortechmfg.com



MODEL 1036-12 WALL MOUNT AUTOPSY STATION DOURLE CINK

STANDARD DESIGN FEATURES

Width:		
Length:		
Working Height:	34 in./86	cm

- All stainless steel construction with heliarc-welded seams and joints, ground and polished to a smooth finish
- Exhaust duct with 24 in./60 cm.
- X 8 in./20 cm. grill Full length specimen shelf (12 in./30 cm. wide x "length of the unit"),

- (12 in/30 cm, wide x lengin of the drift Large radius on all inside corners for easy cleaning and required sanitation (2) Large single-compartment sinks with rapid and positive drainage (2) Cart-to-sink locking mechanisms with slide latch which can be meaned form with a side of accessed from either side of the carrier

- Large instrument drawer
 Plumbing and electrical lines are factory-installed and require only minimum installation

- GFCI duplex receptacle w/ waterproof cover (2) Heavy-duty commercial waste disposers, 1/2 hp and switches Light fixture over the work area (2) Deluxe aspirators with reverse flow for additional waste removal: "reverse flow" foot in instantly roligious suction flow" feature instantly relieves suction clogging by providing a reverse pressure of water (2) Hot and cold water fixtures with
- convenient goose-neck faucet and wist blade handles

- (2) Spray hose assemblies with cold water control valve, nozzle and 10 ft./3 m. of flexible hose
 Complete back-siphon protection
- provided by reduced pressure principle assembly

Plumbing fixtures can be located in various positions depending on your desired work environment

All measurements in inches/centimeters +-









SPRAY HOSE ASSEMBLY




CART LATCH w/ LOCKING MECHANISM



Optional Features & Accessories See pages 3-13 to 3-17 for a full list of sink station accessories.

Options based on available space When planning an order, we will assist you in selecting options to complete your system. Please feel free to contact us.

Custom layout and designs are available.

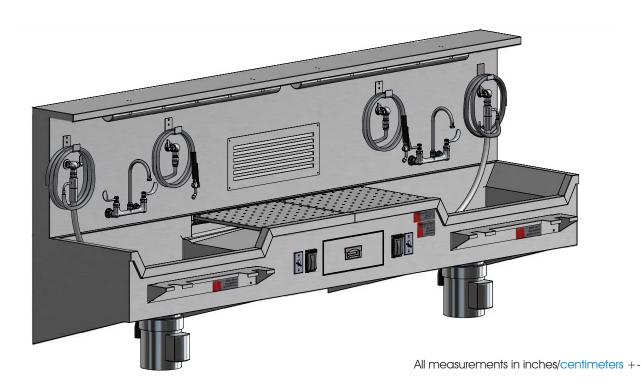

MODEL 1036-25-C Center MODEL 1036-25-L Left MODEL 1036-25-R Right MODEL 1036-25-D Double



MODEL 1036-25 CENTER, LEFT, RIGHT, DOUBLE VENTILATED EMBAIMING STATION

STANDARD DESIGN FEATURES

Model 1036-25-C Sink Center Model 1036-25-L Sink Left Model 1036-25-R Sink Right Model 1036-25-D Double Sink

- All stainless steel construction with heliarc-welded seams and joints, ground and polished to a smooth finish Vent system for connection to
- embalming tables Exhaust duct for connection to building ventilation system for exterior connection at top of station
- Quick-connect plumbing and electrical for connection to embalming table
- Full length specimen shelf (12 in./30 cm. wide x "length of the unit" Large radius on all inside corners for
- easy cleaning and required sanitation

- Large single-compartment sink with
- rapid and positive drainage Cart-to-sink locking mechanism with slide latch which can be accessed from either side of the carrier
- Large instrument drawer(s)
- Plumbing and electrical lines are factory-installed and require only minimum installation
- GFCI duplex receptacles w/ waterproof cover

- GFCI duplex receptacles w/ waterpicor ex Heavy-duty commercial waste disposer, 1/2 hp and switch
 Light fixture(s) over the work area
 Deluxe aspirator with reverse flow for additional waste removal: "reverse flow" feature instantly relieves suction clogging by providing a reverse clogging by providing a reverse pressure of water
- Hot and cold water fixture(s) with convenient goose-neck faucet and wrist blade handles
- Spray hose assembly with cold water control valve, nozzle and 10 ft./3 m. of flexible hose
- Complete back-siphon protection provided by reduced pressure principle assembly

Plumbing fixtures can be located in various positions depending on your desired work environment

All measurements in inches/centimeters +-



Model	1036-25-C Sink Center

Width:	29 in./74	cm.
Length:1	14 in./289	cm.
Working Height:	34 in./86	cm.

Model 1036-25-L Sink Left

Width:	.29 in./74	cm.
Length:		
Working Height:	.34 in./86	cm.

Model 1036-25-R Sink Right

Model 1036-25-D Double Sink



DOCKING VENTILATED 600035




UTILITY DRAWER

SINK STATIONS



Optional Features & Accessories

See pages 3-13 to 3-17 for a full list of sink station accessories.

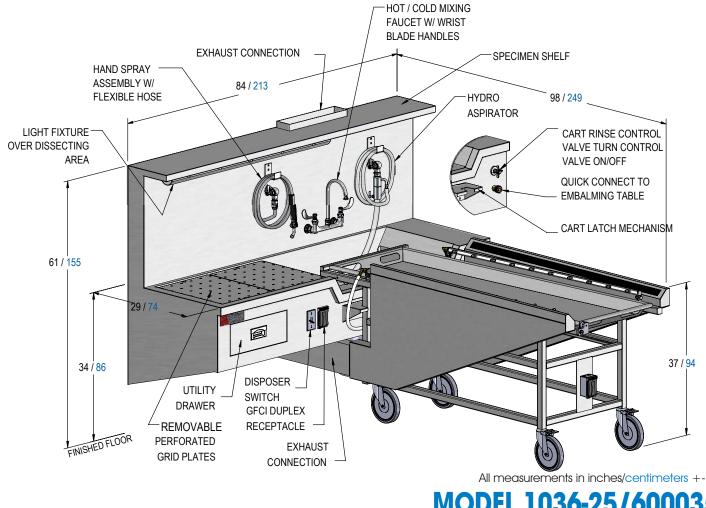

MODEL 1036-25/600035 LAYOUT DRAWING & OPTIONAL FEATURES

SINK STATIONS MODEL 600035 VENTILATED EMBALMING TABLE

STANDARD DESIGN FEATURES


Width:	
Length:	80 in./203 cm.
Height (Tray working):	
Height (Overall):	

The stainless steel embalming table is equipped with rollers and is designed as an integral part of the embalming process and cadaver handling. It accepts the standard stainless steel body trays (T3626). It is sloped for drainage and uses rollers that allow for easy loading and unloading of cadavers, which makes transferring to the 86-129 Roller Rack or any of the Mortuary Refrigerators very easy.

- A tray rinse for easy cleaning, sanitation and rapid disposal of waste materials
- Fabricated from 1.5 in./3 cm. square, .12 tubing thickness, 304 stainless steel tubing
- Stainless steel has a grained finish and all welds match adjoining surfaces
- (4) 8 in./20 cm. casters, all with brake mechanism
- Designed with a permanent slope of 3 in./5 cm.
- Standard design for 23 in./58 cm. body tray, please inquire for special order sizes

- Flip-latch to hold tray in position while in transport
- Easy quick connections for electrical and water rinse assembly
- GFCI duplex receptacle w/ waterproof cover
- (2) Flip tray rinse assemblies
- (2) side perforated exhaust downdraft ventilation connections (connect to the 1036-25 Ventilated Embalming Station)

All measurements in inches/centimeters +-

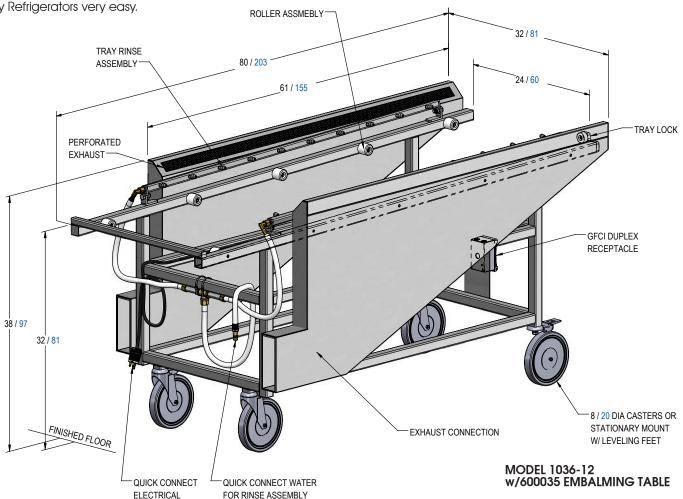



AUTOPSY STATION FEATURES & ACCESSORIES

SINK STATIONS

Options based on available space

When planning an order, we will assist you in selecting options to complete your system. Feel free to contact your sales associate.

Pictured accessories may differ depending on your unit and other optional accessories. Not all accessories available for all models. Please review the model's standard features to ensure accuracy of specifications.



LC-50 - 1/2 HP HEAVY DUTY COMMERCIAL DISPOSER Standard on most sinks. Variable power options. Available in 1/2, 1 or 2 HP.



SS-100, SS-200 - HEAVY DUTY COMMERCIAL DISPOSER Variable power options. Available in 1 or 2 HP.



OA-100-WM - CO2/NATURAL GAS VALVES All brass with chrome plated finish. Wall Mounted. Visually marked for type of function required.



OA-101-WM - COMPRESSED AIR VALVE All brass with chrome plated finish. Wall Mounted. Visually marked for type of function required.



OA-102-WM - VACUUM VALVES All brass with chrome plated finish. Wall Mounted. Visually marked for type of function required.



OA-111 - EMERGENCY EYEWASH / HOSE ASSEMBLY Hand controlled spray to provide a gentle flow of water to rinse eyes of foreign debris.




OA-112 - EYEWASH / FAUCET ASSEMBLY Deck Mounted Eye wash for hands free eye wash or can be removed for use as a drench hose for eye, face, or body use coverage.



OA-113 - EYEWASH - FLIP DOWN STYLE Wall mounted polished chrome-plated brass single action pull down activated eye/face wash.



OA-150 - SPRAY HOSE ASSEMBLY Easy grip assembly with flexible hose, conveniently placed for easy spray cleaning.

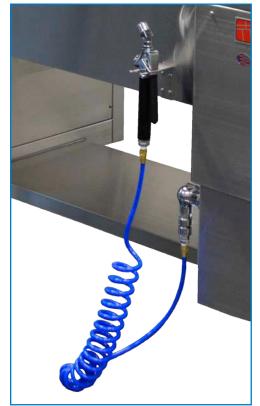

OA-506 - SPRAY HOSE ASSEMBLY WITH BACKFLOW & RECOIL HOSE Wash off contaminants and debris with flexible and wide reaching recoil hose.

SINK STATIONS AUTOPSY STATION FEATURES & ACCESSORIES

Options based on available space When planning an order, we will assist you in selecting options to complete your system. Feel free to contact your sales associate.

Pictured accessories may differ depending on your unit and other optional accessories. Not all accessories available for all models. Please review the model's standard features to ensure accuracy of specifications.



OA-203 - ADDITIONAL MIXING FAUCET WITH VACUUM BREAKER Add an additional faucet with vaccuum breaker included.



OA-204 - HANDS FREE MIXING FAUCET Toggle a steady stream of water with this motion activated sensor.



OA-225 - SELECTA SPRAY HOSE ASSEMBLY Ideal for cleaning laboratory glassware, and variety of other instruments using either water or pressurized air.



OA-226 - SELECTA SPRAY HOSE ASSEMBLY ACCESSORIES Multi-purpose accessories for cleaning pipettes, syringes, catheters, curettes, endoscopes, cystoscopes, cannulae and a variety of other instruments.



OA-210 - VENT CONNECTION (TOP SINK)



LW480 - HYDRO ASPIRATOR With built-in vacuum breaker and control lever used to reverse the flow of water directing it through the hose connections for drawing fluid or rinsing.



LW481 - ASPIRATOR EXTENSION Fabricated from chrome plated brass. and provides further safety against polluted backflow.



OA-206 - EXHAUST DUCT 8 x 10, Each




LW482 - NON-CLOGGING ASPIRATOR HEAD Prevents large debris from entering and clogging the system.



AHT - TROCAR TUBING 10 ft. min., priced per foot. Clear vinyl Aspirator/Trocar tubing. Internal diameter of .375 in. and outside diameter of .625 in.



AHS - ASPIRATOR DISCHARGE TUBING 3 ft. min., priced per foot. Splash tubing for aspirator drain, embalming and autopsy tops. Internal diameter of 1 in. and outside diameter of 1.25 in..



OA-115 - THREE SIDED RINSE ASSEMBLY Provides a rinse to gently wash debris and non-viable material away from the work area. A sturdy stainless steel assembly controlled by an on/off valve.



OA-116 - END RINSE ASSEMBLY Provides a constant flow of water beneath the dissecting area grid plates to wash debris toward sink and drain. Includes cold water control valve and back flow protection.



OA-202 - ELECTRIC ASPIRATOR Diaphragm pump unit designed for high performance, powerful suction capability, when and where you need it at a moment's notice. Accommodates 600 ml. glass bottle or 1100 ml. disposable canisters.



LW418 - ELECTRONIC SCALE - PLATFORM 6.5 in. x 5.5 in. Platform, 2000g. Compact, lightweight, portable and perfectly suited for laboratory and educational purposes. 2200 x 1 gm.



LW419 - ELECTRONIC SCALE - PLATFORM *6.6 in. x 6 in. Platform, 2100g.* Compact, lightweight, portable and perfectly suited for laboratory and educational purposes. 2200 x .1 gm.



LW425 - ELECTRONIC SCALE - PLATFORM *6 in. Platform, 2000g.* Compact, lightweight, portable and perfectly suited for laboratory and educational purposes. 2200 x .1 gm.



LW410 - SCALE POLE AND MOUNTING BRACKET For use with standard hanging autopsy scale. Pole can swivel left and right, and includes locking knob. 44 in. length.



OA-205 - STAINLESS STEEL SCALE SHELF All stainless steel construction adds storage space for accessories. 12 in. x 12 in.



LW485 - EVIDENCE SCREEN Designed to prevent evidence from being washed down drain. Fabricated from perforated stainless steel. For use in 3.5 in. diameter drains.




LW487 - ORGAN RINSE BASKET Designed to hang on the interior of the sink basin. Ideal for rinsing organs. Fabricated from stainless steel with a perforated bottom.

Options based on available space

When planning an order, we will assist you in selecting options to complete your system. Feel free to contact your sales associate.

Pictured accessories may differ depending on your unit and other optional accessories. Not all accessories available for all models. Please review the model's standard features to ensure accuracy of specifications.



LW385, LW386, LW387 - DISSECTING BOARDS Available in 24 in. x 18 in., 18 in. x 12 in. & 20 in. x 15 in.



LW389 - PHOTO-BLUE DISSECTING BOARD Manufactured from high-density polyethylene, providing an excellent cutting surface. Bottom corners have a non-skid rubber foot attached.



LW379 - DISSECTING BOARDS w/ 3 in. LEGS Manufactured from high density polyethylene. Provides an excellent cutting surface. 20 in length x 15 in width x .7 in thick cutting board



LW379A - RAISED DISSECTING PLATFORM Manufactured from high density polyethylene with adjustable legs. Provides an excellent cutting surface. Color is photo blue.

Options based on available space When planning an order, we will assist

you in selecting options to complete your system. Feel free to contact your

Pictured accessories may differ depending on your unit and other optional accessories. Not all accessories available for


all models. Please review the model's standard features to

sales associate.

ensure accuracy of specifications.



LW380 - INSTRUMENT DISSECTING TRAY Stainless steel construction. Heavy gauge material provides a highly stable work surface. Tray creased toward center drain with optional hose attachment to route flow. Custom heights available.



LW392 - RAISED BODY BOARDS Elevates body away from work surface.



OA-201 - FORMALIN DISPENSING AND COLLECTION 2.5 gal. container and receptacle hold reserve formalin and collects waste. Foot controlled motor dispenses formalin at a steady flow. Conveniently placed formalin supply spout included.



OA-147-1, OA-147-2, OA-147-3 GLOVE BOX HOLDER Stainless Steel support to hold latex and nitrile glove boxes, holders come in a side or top load model. Available in 1, 2, & 3 capacity.




AUTOPSY STATION FEATURES & ACCESSORIES

SINK STATIONS



OA-144 - MAGNETIC INSTRUMENT HOLDER Conveniently store and organize your instruments.



LW390 - HEADREST LW390-A - HEADREST - Aluminum LW390-B - HEADREST - Black



OA-209-84, OA-209-114, OA-209-132 -STAINLESS STEEL LEG ASSEMBLY




OA-208 - INTEGRAL RAISED DISSECTING AREA



HEIGHT ADJUSTABLE SINK MOUNT STRUCTURE



SLA-50 - SURGICAL LIGHT Provides both amazing illumination, unparalleled aesthetics and many more features that make it the right light for any procedure.

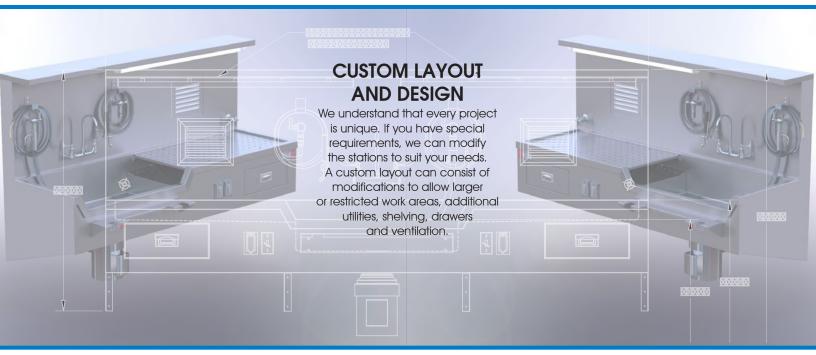

Pictured accessories may differ depending on your unit and other optional accessories. Not all accessories available for all models. Please review the model's standard features to ensure accuracy of specifications.



Tall Filler Spout for Embalming Machine The tall faucet is designed for your embalming machine to fit under the spout. By using the master mixing valve, you can supply the desired temperature to the tank of your machine. The spout can be easily turned around, out of the way when not in use.

Table Rinse

A serrated attachment is provided for quick connection of rinse hose. A constant flow of water can be supplied to the embalming table for cleaning or procedure purpose. The rinse is vacuum breaker protected for backflow prevention. Rinse Hose included.

Master Mixing Valves Water temperature for the table rinse and tall faucet are easily controlled with the master mixing valves. Simply adjust lever until the desired temperature is achieved.

Hydro-Aspirator Assembly A hydro-aspirator with built-in vacuum breaker prevents contamination of your water supply. The clear-sight drain alise prevents contamination since the air gap will not allow aspirated material back into the aspirator

assembly. A valve is provided to control water supply to the aspirator assembly. Includes 10 ft./3 m. aspirator hose, 5 in./12 cm. aspirator drain hose and 10 ft./3 m. spray hose.

Easy Installation The entire unit is pre-assembled and pre-plumbed for easy installation. Simply drop into the cutout in your countertop and connect the utility lines. The base plate is fabricated of heavy gauge stainless steel. Will install incounters as shallow as 18 in./46 cm. in depth.

Specify Left or Right configuration. Tall filler spout designates side.

LW480 Aspirator Deluxe hydro-aspirator with built-in vacuum breaker and control lever to be used to reverse the flow of water so as to direct it through the hose connections for either drawing fluid from the body cavity or rinsing a desired location. Fits most standard faucet threads. Fabricated from chrome plated brass.

LW481 Extension

The hydro-aspirator extension is fabricated from chrome plated brass. It provides further safety against polluted backflow.

LW482 Non-clogging Head The Non-Clogging Aspirator Head prevents large debris from entering and clogging the system.

Aspirator Hose Quality Clear Vinyl Tubing.

AHT

~Aspirator/Trocar tubing, ID: .375", OD 625" sold per 10 foot section.


AHS

~Splash tubing for Aspirator Drain, Embalming and Autopsy tops. AHS sold by the foot ID: 1", OD 1.25" (10 feet/3 meters minimum order).



Height:		
Length:	11.5 in./29 cm.	
Width:	12 in./30 cm.	

- Continuous rinse moves debris of harmful contaminants and air-borne pathogens down the drain.
- Full stainless steel construction, makes it aesthetically pleasing and easy to clean and maintain.
 Cold water control adjusts flow.

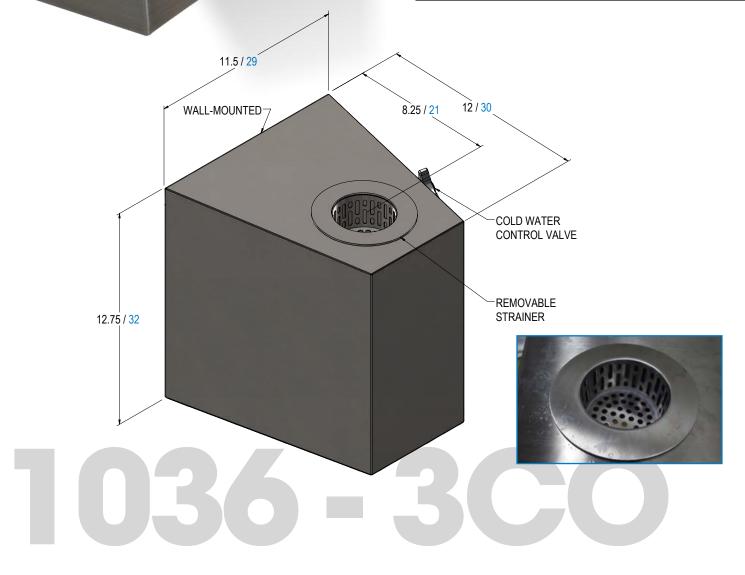


STANDARD DESIGN FEATURES

Top deck height:41 in	./104 cm.
Overall height:	/175 cm.
Length (Left to Right):	n./81 cm.
Depth (Front to Back):	n./81 cm.
Shelf depth:20 i	n./51 cm.

- All stainless steel construction
- Hot and cold water mixing faucet mounted on top deck with high spout for use with your embalming machine Hydro-aspirator with cold water control
- Hand Spray Assembly with nozzle and 10 feet/3 meters of flexible hose
- Back flow protection for all fixtures to protect your building's water supply
 Access panel
 Internally plumbed and wired, requiring path and wired for the support of the suppo
- only single point connection for water and power
 Removable strainer captures large waste
- not meant to be drained
- Continuous rinse moves debris of harmful contaminants and air-borne pathogens down the drain
- Full stainless steel construction, makes it aesthetically pleasing and easy to clean and maintain

EMBALMING TABLE COLLECTION STATION

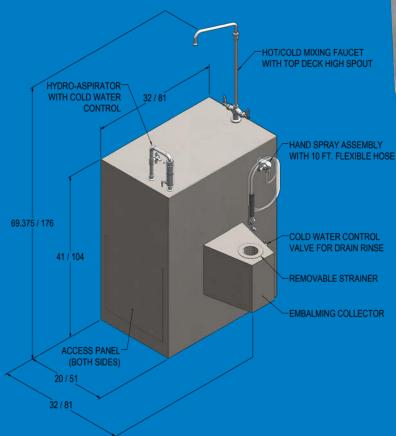


GIND



Removable Evidence Screen

MODEL 1036-2 WALL MOUNT SERVICE STATION



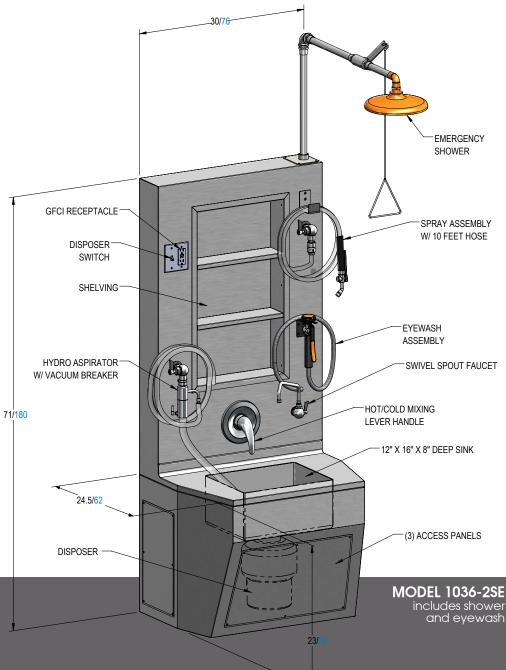

STANDARD DESIGN FEATURES

Height:	71 in ./180 cr
Width:	24.5 in./62 cr

n

- Fully Fabricated of stainless steel
 Spray hose assembly with cold
- water control valve, nozzle and 10 ft./3 m. of flexible hose Waste disposer unit
- Hot and cold water tempering unit with lever handle Utility faucet with elbow handle and •
- swivel spout
- GFCI duplex receptacle

- Deluxe aspirator with reverse flow for additional waste removal: "reverse additional waste removal: reverse flow" feature instantly relieves suction clogging by providing a reverse pressure of water
 Open stainless steel shelving designed for storage of chemical bottles
 1036-2SE includes emergency shower and avaywath assembliant

- and eyewash assemblies All plumbing and electrical hook-ups designed for easy installation

All measurements in inches/centimeters +-



411 North Aerojet Avenue Azusa, CA 91702 www.mortechmfg.com

STANDARD DESIGN FEATURES

Top deck height:	41 in./104 cm.
Overall height	70 in./178 cm.
Length (Left to Right):	
Depth (Front to Back):	40 in./91 cm.
Shelf depth:	

Sink size:	
Length	30 in./76 cm.
Width:	19 in./48 cm.
Depth:	8 in./20 cm.

- All stainless steel construction
- Large sink basin
- Hot and cold water mixing faucet mounted on top deck with high spout
- for use with your embalming machine Deluxe aspirator with reverse flow for additional waste removal: "reverse flow" feature instantly relieves suction clogging by providing a reverse
- pressure of water Wall mount (standard) or floor mount available
- Cold water spray hose assembly with spray nozzle • GFCI duplex receptacle w/ waterproof
- cover
- Access panelInternally plumbed and wired, requiring only single point connection of water and power

All measurements in inches/centimeters +-

Optional Accessories

- Splash guard cover for sink basin Waste disposal unit


- Eyewash assembly
 Perimeter sink rinse assembly
 Hot and cold water mixing faucet

- Exhaust vent to connect to building ventilation system
 Hot and cold water spray hose assembly with spray nozzle




TROCAR HOLDER ATTACHMENT AVAILABLE UPON REQUEST

MODEL 1036-9M STAINLESS **STEEL EMBALMING STATION**

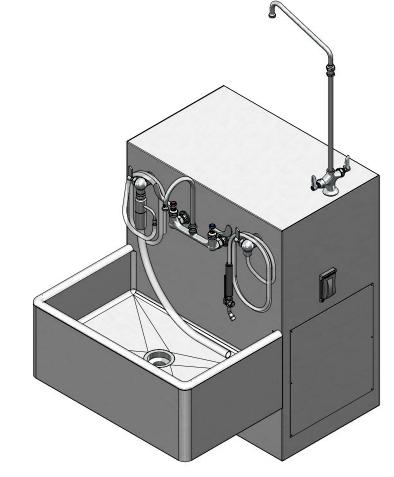



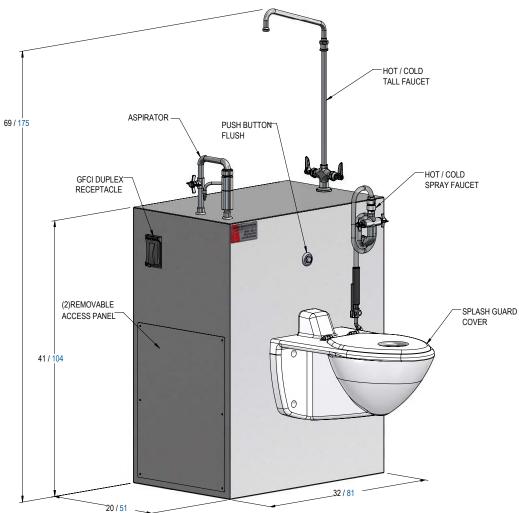

Top deck height:	41 in./104 cm.
Overall height:	
Length (Left to Right):	
Depth (Front to Back):	
Shelf depth:	

- All stainless steel construction on rear base housing
- Large white vitreous china flush sink
 Hot and cold water mixing faucet mounted on top deck with high spout for use with you embalming machine
- Deluxe aspirator with reverse flow for additional waste removal: "reverse flow" feature instantly relieves suction clogging by providing a reverse pressure of water
- Hot and cold spray hose assembly with spray nozzle and 10 feet/3 meters of flexible hose
- Stainless steel splash cover with port for placement
- of embalming table drain hose Push button control to flush sink basin
- Back flow protection for all fixtures to
- protect your building water supply GFCI duplex receptacle w/ waterproof cover
- Access panel
- Internally plumbed and wired, requiring only single point connection of water and power

All measurements in inches/centimeters +-

MODEL 1036-13 FLUSH EMBALMING STATION



R.

- All stainless steel construction
- All inside corners are rounded for ease
- in cleaning Thermostatically controlled mixing valve for proper water temperature High side panels to control splash ō ٠
- Available water operation: 1. Knee or thigh-operated push panels 2. Foot pedal 3. Infrared/hands free controls
- Available soap operation:

 - 1. Hand pump 2. Infrared/hands-free controls

Optional Accessories

- Battery-operated timer •
- Bottom skirt to conceal plumbing lines or when foot-operated water • controls are used

All measurements in inches/centimeters -



411 North Aerojet Avenue Azusa, CA 91702 www.mortechmfg.com

1

4

-1



Height:		
Length:		
Width:		11
	a summer and	100

- All stainless steel constructionAll inside corners are rounded for ease
- All Inside conters die rounded for ease in cleaning Thermostatically controlled mixing valve for proper water temperature High side panels to control splash Available water operation: •
- - 1. Knee or thigh operated push panels 2. Foot pedal
- 3. Infrared/hands-free controls • Available soap operation:
 - 1. Hand pump
 - 2. Infrared/hands-free controls

Optional Accessories

- Battery-operated Timer
 Bottom Skirt to conceal plumbing lines or when foot-operated water controls are used
- Station dividers




28/71 (3) THERMOSTATICALLY 92/234 CONTROLLED MIXING VALVE **REMOVABLE STATION DIVIDERS** (2) INFRARED PROXIMITY HIGH SIDE PANEL SENSOR SOAP DISPENSER 36 / 91 12/30 (3) KNEE OR THIGH FINISHED FLOOR (3) ACCESS DOOR OPERATED PUSH PANEL

MODEL SS103 TRIPLE SCRUB STATION

MORTEON



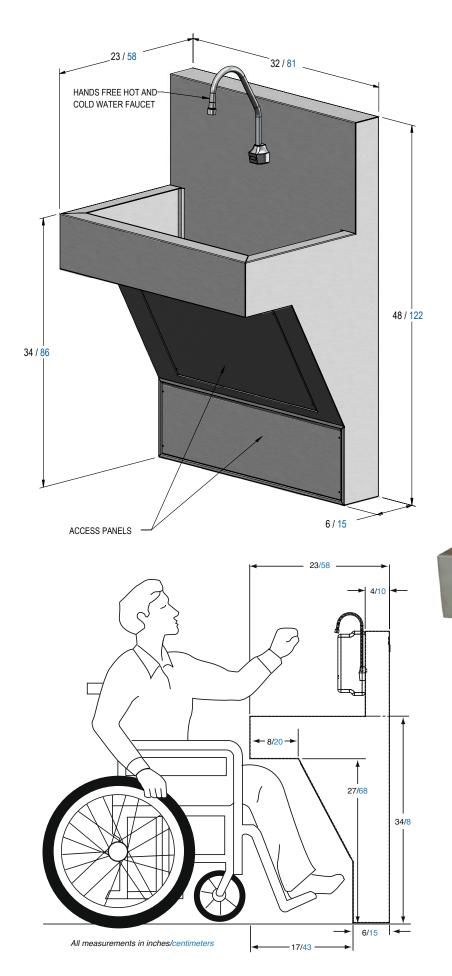

MODEL SS101-ADA SINGLE SCRUB ADA WASHSTATION

STANDARD DESIGN FEATURES


Height:	
Length:	
Width:	23 in./58 cm.


- All stainless steel construction All inside corners are rounded for ease
- All inside connect are realized to realized to the second secon
- Gooseneck faucet with Infrared/hands free controls
- Soap dispenser with Infrared/hands-free control
- Meets ADA requirements







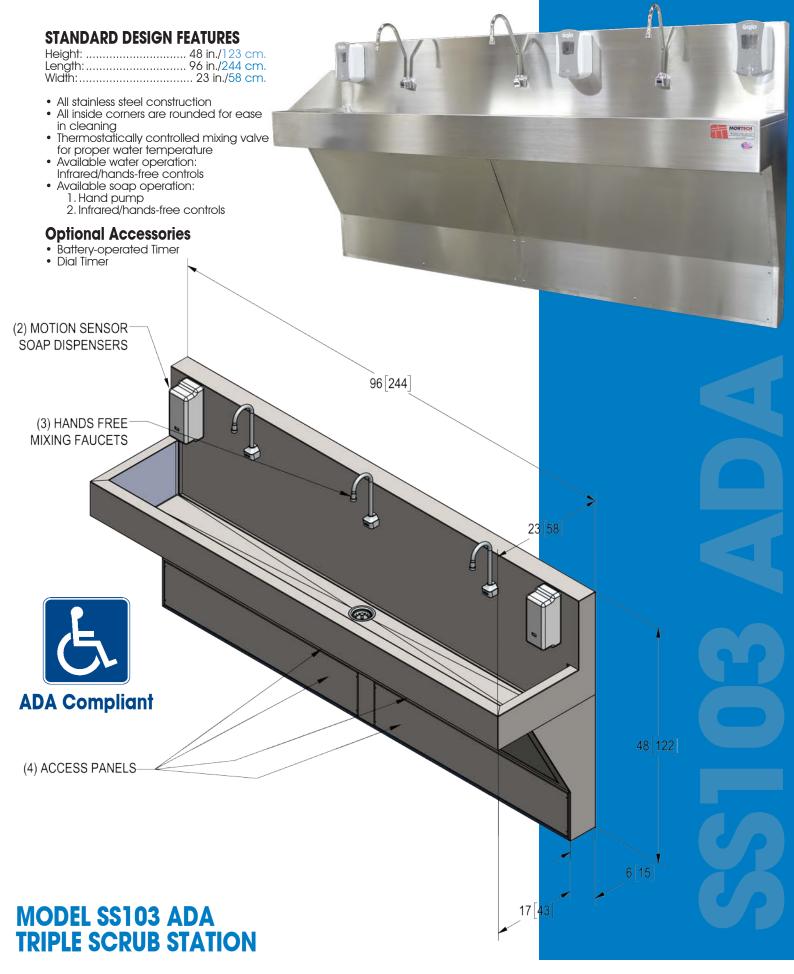

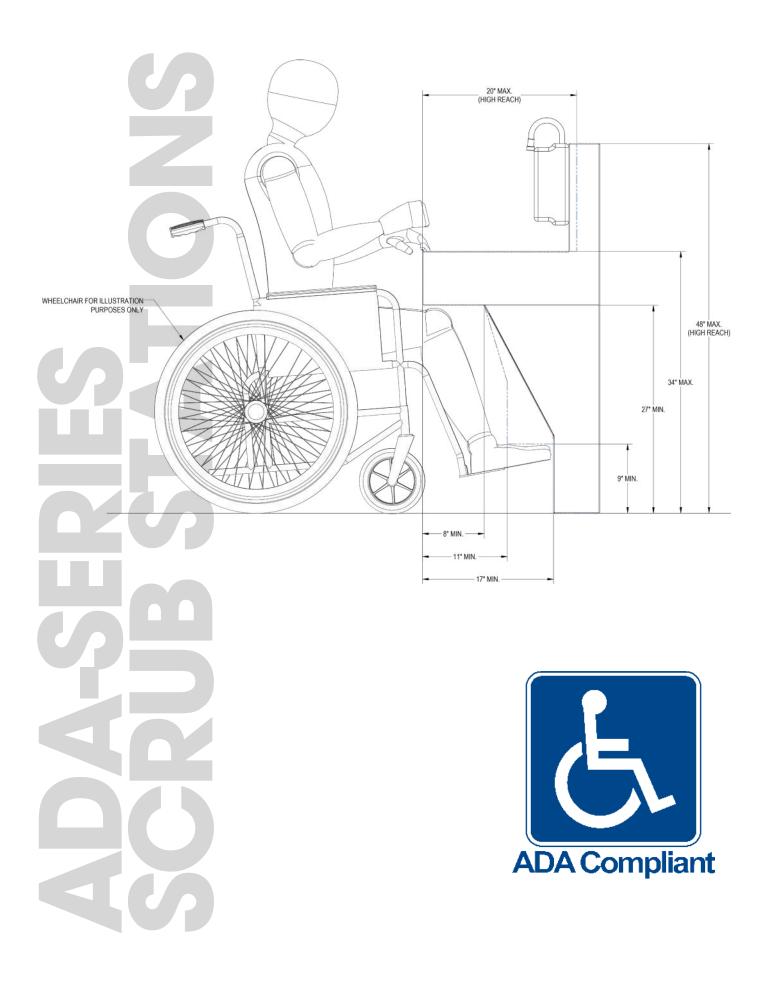





STANDARD DESIGN FEATURES

Height:	.36 in./91 cm.
Length:	.32 in./81 cm.
Width:	

- All stainless steel construction
 Sink: 20L x 12W x 6 .5D/ 51L x 30W x 16.5D
 Gooseneck faucet with vacuum breaker
 4" Diameter swivel casters


- Flexible utility tie-in w/ quick disconnect
 Flexible Drain Hose w/ quick disconnect


Optional Accessories

- Waste disposer unit (1/2 hp, 1 hp or 2 hp)
 Infrared operated water control
 Hand-spray hose assembly

All measurements in inches/centimeters +-

MODEL SS115 MOBILE WASH STATION

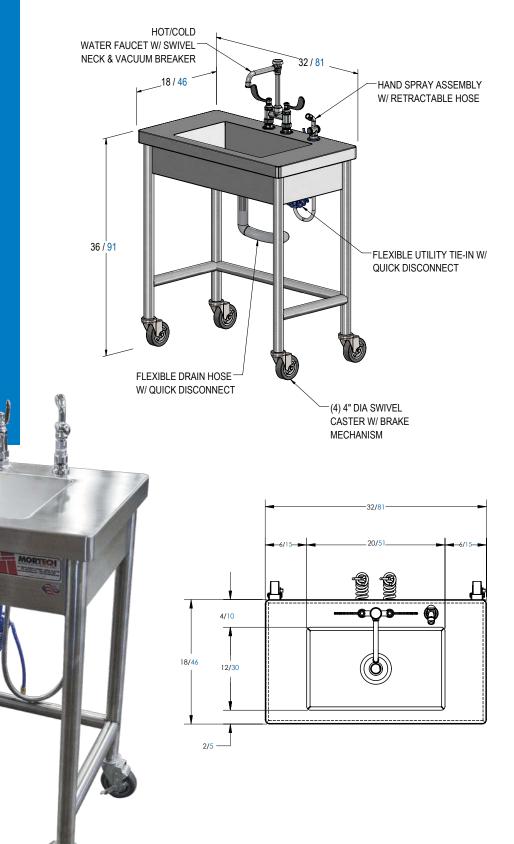

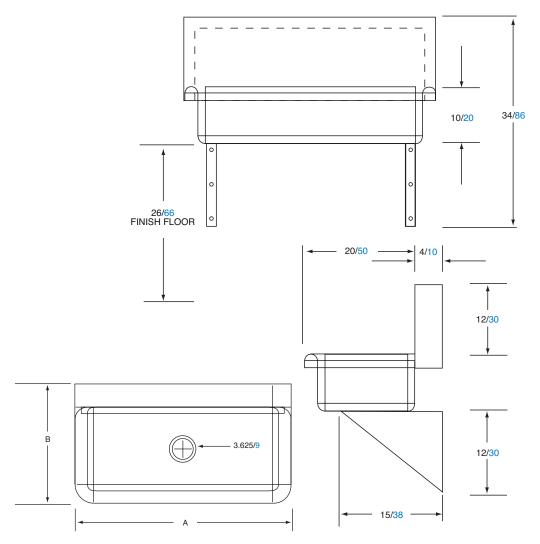

- Stainless steel wash sinks are made with 16 gauge Type 304 stainless steel
- All interior and exposed exterior is a No.4 finish
- All corners are rounded for easy cleaning
- Centered 3.625 in./9 cm. drain opening with sink basin creased to provide positive flow towards the drain
- Comes complete with stainless steel supporting brackets for wall-mount
- Quantity of support brackets will vary depending on length of station to be provided


Optional Accessories

- Mixing faucets, manual
- Hands-free mixing faucets
- Spray hose assembly

<u>Order</u> Number	Overall Size A X B "A"	Capacity
MWS 24 MWS 30 MWS 36 MWS 48 MWS 60 MWS 72 MWS 84 MWS 96	24/60 x 24/60 30/76 x 24/60 36/91 x 24/60 48/121 x 24/60 60/152 x 24/60 72/182 x 24/60 84/231 x 24/60 96/243 x 24/60	One Person One Person Two Person Two Person . Three Person . Three Person


All measurements in inches/centimeters


All measurements in inches/centimeters

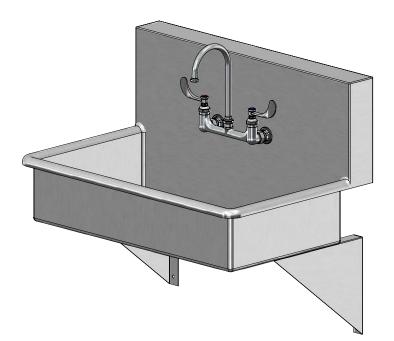

ECONOMY STYLE STAINLESS STEEL WASH STATIONS



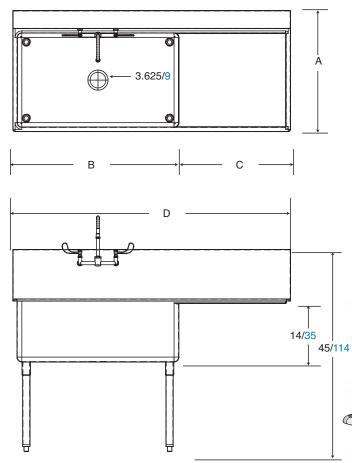

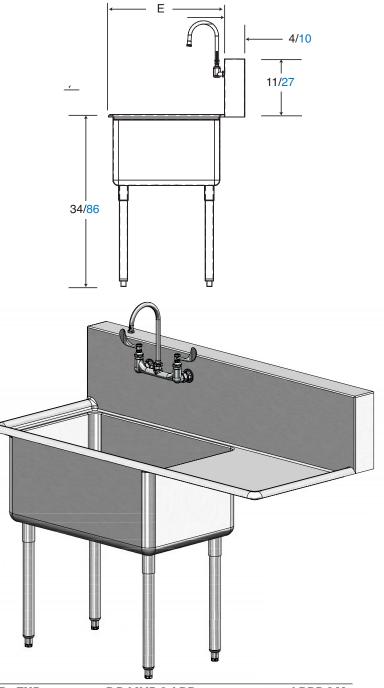

- Sink depth: 14 in./35 cm.
 Rim: 1.5 in./3 cm. diameter
 Legs: 1.625 in./4 cm. diameter
 Rounded sink and drainboard
 Sink punched with 3.625 in./9 cm. center drain
 16 gauge stainless steel

Optional Accessories

- Waste disposer unit -1/2 hp, 1 hp, 2 hp
 Mixing faucets, manual
 Hands-free mixing faucets
 Spray hose assembly
 Double sink


Custom quotations upon request. Please specify: size, gauge, and type of construction required. Legs may be added at drain-board end for more stability.

ORDER	I.D. TUB	DRAINBOARD	APPROX.
NUMBER	DIMENSIONS	DIMENSIONS	DIMENSIONS
	W x L	W x L	OVERALL
	E x B	C x E	D x A
MS1818-18	18/45 x 18 45	18/45 x 18/45	38/96 x 22/55
MS2130-24	21/53 x 30/76	21/53 x 24/60	56/142 x 25/63
MS2136-24	21/53 x 36/91	21/53 x 24/60	62/157 x 25/63
MS2424-24	24/60 x 24/60	24/60 x 24/60	50/127 x 28/71
MS2430-24	24/60 x 30/76	24/60 x 24/60	56/142 x 28/ 71
MS2436-24	24/60 x 36/91	24/60 x 24/60	62/157 x 28/ 71
MS2442-24	24/60 x 42/106	24/60 x 24/60	68/172 x 28/ 71
MS2448-24	24/60 x 48/121	24/60 x 24/60	74/187 x 28/ 71
MS2448-24	24/60 x 60/152	24/60 x 24/60	86/218 x 28/ 71

All measurements in inches/centimeters

ONE DRAIN BOARD STAINLESS STEEL SCULLERY SINK

TWO DRAIN BOARD STAINLESS STEEL SCULLERY SINK

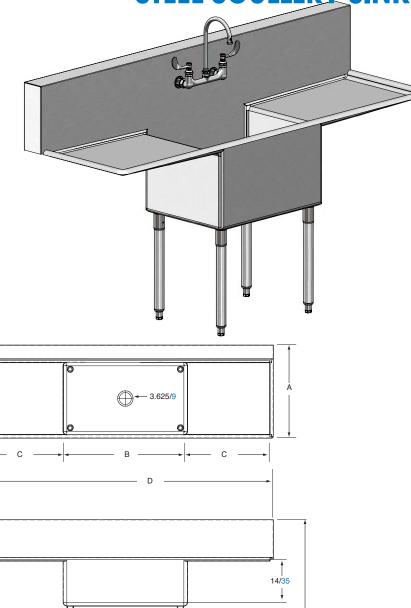


STANDARD DESIGN FEATURES

- Sink depth: 14 in./35 cm.
 Rim: 1.5 in./3 cm. diameter
 Legs: 1.625 in./4 cm. diameter
 Rounded sink and drainboard
 Sink punched with 3.625 in./9 cm.
- center drain • 16 gauge stainless steel

Optional Accessories

- Waste disposer unit -1/2 hp, • 1 hp or 2 hp
 Mixing faucets, manual
- Hands-free mixing faucets
 Spray hose assembly
 Double sink


Custom quotations upon request. Please specify: size, gauge, and type of construction required. Legs may be added at drainboard end for more stability.



ORDER	I.D. TUB	DRAINBOARD	APPROX.
NUMBER	DIMENSIONS	DIMENSIONS	DIMENSIONS
	W x L	W x L	OVERALL
	E x B	C x E	D x A
MS1818LR-18	18/45 x 18/45	18/45 x 18/45	54/137 x 22/55
MS2130LR-24	21/53 x 30/76	21/53 x 24/60	78/198 x 25/63
MS2136LR-24	21/53 x 36/91	21/53 x 24/60	84/213 x 25/63
MS2424LR-24	24/60 x 24/60	24/60 x 24/60	72/182 x 28/71
MS2430LR-24	24/60 x 30/76	24/60 x 24/60	78/198 x 28 /71
MS2436LR-24	24/60 x 36/91	24/60 x 24/60	84/213 x 28 /71
MS2448LR-24	24/60 x 42/106	24/60 x 24/60	90/228 x 28 /71
MS2448LR-24	24/60 x 48/121	24/60 x 24/60	96/243 x 28 /71
MS2460LR-24	24/60 x 60/152	24/60 x 24/60	108/274 x 28 /71

All measurements in inches/centimeters

45/114

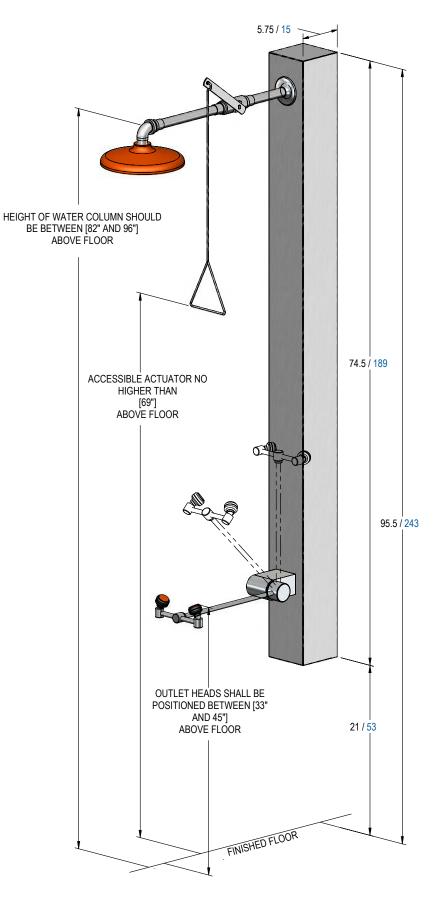

MODEL LW399 WALL-MOUNT SHOWER & EYEWASH







The wall-mount shower and eyewash is completely encased in a stainless steel housing. The shower unit consists of a shower head, a shower ball valve, and a pull rod. The eyewash consists of the eyewash assembly and valve w/ pull down activation. Plumbing lines are factory-installed and tested. Unit requires minimal hook-ups at the project location.





DECONTAMINATION SINKS

Mortech decontamination sinks provide a sterile and ergonomical environment for cleansing equipment. Our sinks can be 100% customized to your facilities unique needs. All sinks are fabricated with high quality Type 304 stainless steel. Welded areas are ground and polished to a No. 4 finish for durability and longevity. The quality construction and personalization of our products create an unmatched streamlined and convenient equipment cleaning experience.

- Designed to work as a sterile processing area for cleaning tools and instruments with bio-waste and other contaminants.
- Constructed of 304 stainless steel
- Available in a wide range of configurations and options
- Customized to fit the needs of your facility

Contact your sales associate to design your station, choose from:

- Available in Single, Double, or Triplebowl configuration.
- Waste disposer unit -1/2 hp, 1 hp, 2 hp
- Mixing faucets
- Hands-free foot-pedal mixing faucets
- Spray hose assembly
- Hot and Cold deck-mounted fixtures • Deionize, distilled and RO water faucets.
- Hot and cold water manifold for flushing tubing and hose
- Lever Handle waste drain
- Pistol Spray gun

All measurements in inches/centimeters +-

STANDARD DESIGN FEATURES

The Pistol Spray Gun is the ideal instrument for cleaning laboratory glassware, pipettes, syringes, catheters, curettes, endoscopes, cystoscopes, cannulae and a variety of other instruments and articles used in Sterile Services, laboratories, and medical practices in other words, everywhere where highest cleanliness and hygiene are mandatory.

The Pistol Spray Gun uses either water or pressurized air this means the cleaning process is quick, efficient and inexpensive. The Pistol Spray Gun features a new type of internal flow control mechanism. It permits the smooth and simple adjustment of the water or air flow across the entire range of the trigger movement.

The desired maximum water or air flow can be set by using the small knurled screw located behind the trigger. It is then regulated via the trigger up to the set maximum value.

Multi-purpose Spray Heads

The spray-gun rinser includes spray-gun, tubing and different tips and nozzles for the various cleaning purposes, e.g. a) syringes and cannulas with record cone

- b) measuring and blood pipettes
- catheters and small pipes drainage tubings C)
- d)
- e) syringes and cannulas with Luer cone

- g) spray jet for rapid instrument cleaning
 g) bottles and Erlemeyer flasks
 h) water-jet pump for suction cleaning



ELEVATING DECONTAMINATION SIN



- 34/86 cm. to 44/112 cm. • Sink depth: 10 in./25 cm.
- Rim: 1.5 in./3 cm. diameter
- Rounded sink and drainboard bottoms
- Sink punched with 3.625 in./9 cm. centier drain
- 16 gauge stainless steel

Contact your sales associate to design your station. Choose from:

- Mixing faucets
- Hands-free foot-pedal mixing faucets
- Spray hose assemblyHot and Cold deck-mounted fixtures
- Deionized, distilled and RO water faucets
- Hot and cold water manifold



LASER-ETCHED GRADUATED SINK



HANDS-FREE FAUCET (OPTIONAL)

