


## NOTES: UNLESS OTHERWISE SPECIFIED

1. APPLICABLE STANDARDS AND SPECIFICATIONS; ASME Y14.5-2009, DIMENSIONING AND TOLERANCING ASME Y14.5-2007, ABBREVIATIONS

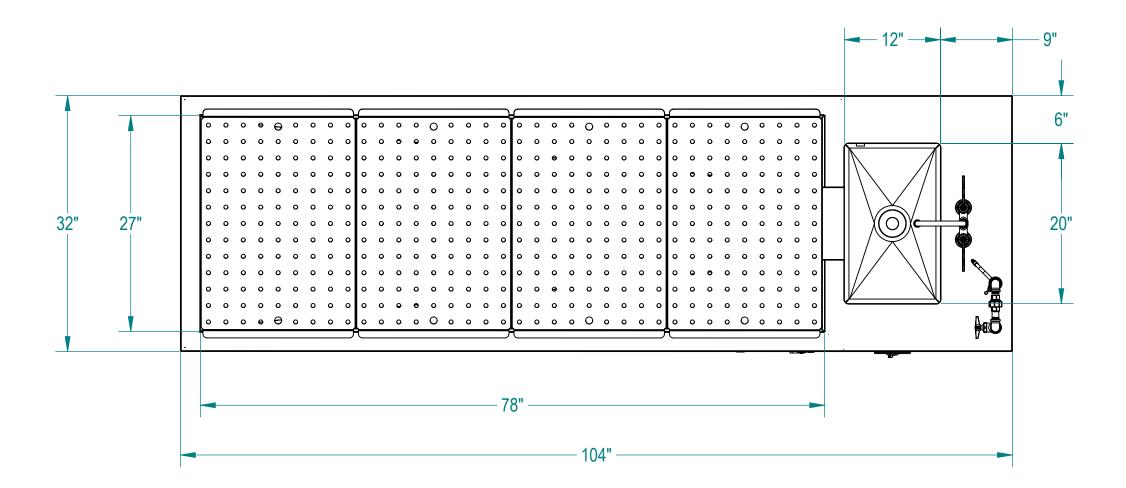

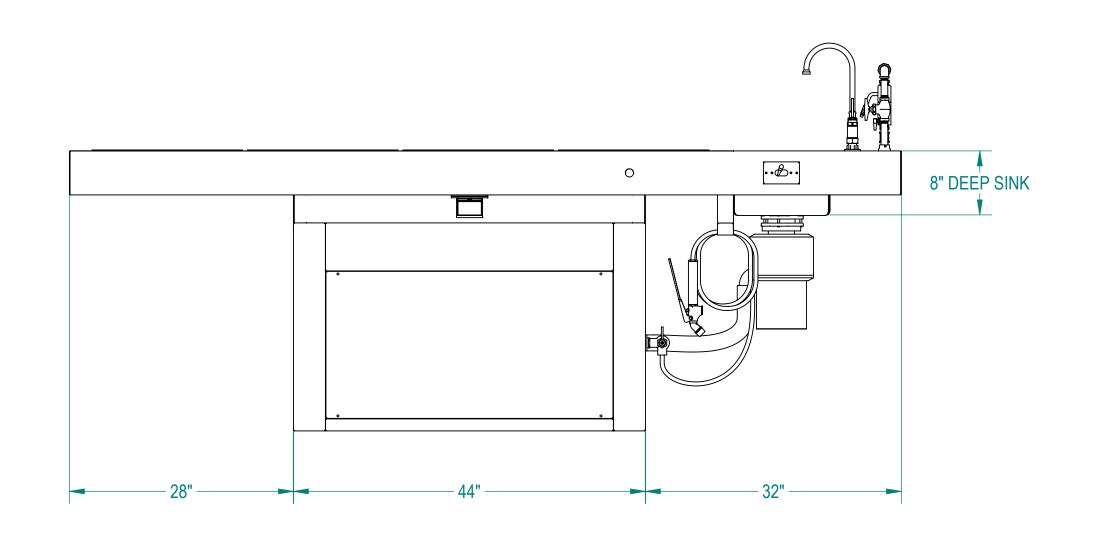


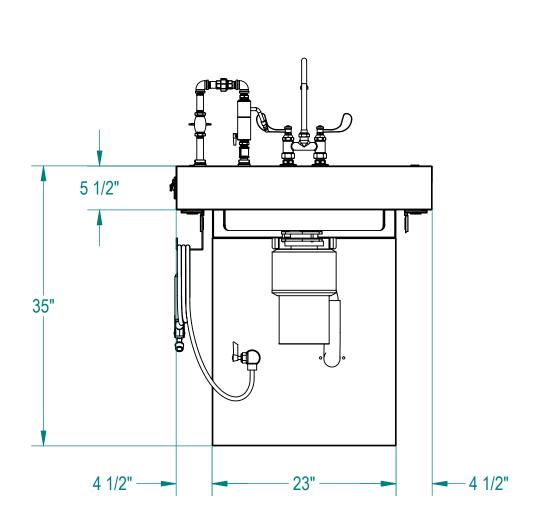

CUSTO	OMER APPROVAL			<u>PROPRIETARY</u>			MOPEC	Mopec		
DDO IF	PROJECT			THIS DOCUMENT AND THE DATE DISCLOSED HEREIN AND HEREWITH IS NOT TO BE REPRODUCED, USED, OR OTHERWISE DISCLOSED IN WHOLE OR IN PART TO ANYONE WITHOUT WRITTEN			GROUP	ELEVATING PATHOLOGY  ***MORTECH ADMINISTRATION AND GROUND ADMINISTRATION ADMINI		
PROJE	201			AUTHORIZATION FROM MOPEC GROUP.			MODEL 1036-41-TD (CE100)			
				DO NOT SCALE DRAWING	APPROVALS	DATE	DEDECTAL AL	ITODOV TARI E VENTED		
				MATERIAL	DRAWN BY		PEDESTAL AUTOPSY TABLE, VENTED			
		SIGNATURE	DATE	304 STAINLESS STEEL	ELISEO S. CHECKED BY	10/10/24	SIZE DWG NO.	136-41-TD	Δ	
				FINISH				טו וד טט	<i>,</i> ,	
				#4	APPROVED BY		SCALE 1:12 NEXT ASSY.	SHEET 1 OF ;	3	

## NOTES: UNLESS OTHERWISE SPECIFIED

1. APPLICABLE STANDARDS AND SPECIFICATIONS; ASME Y14.5-2009, DIMENSIONING AND TOLERANCING ASME Y14.5-2007, ABBREVIATIONS

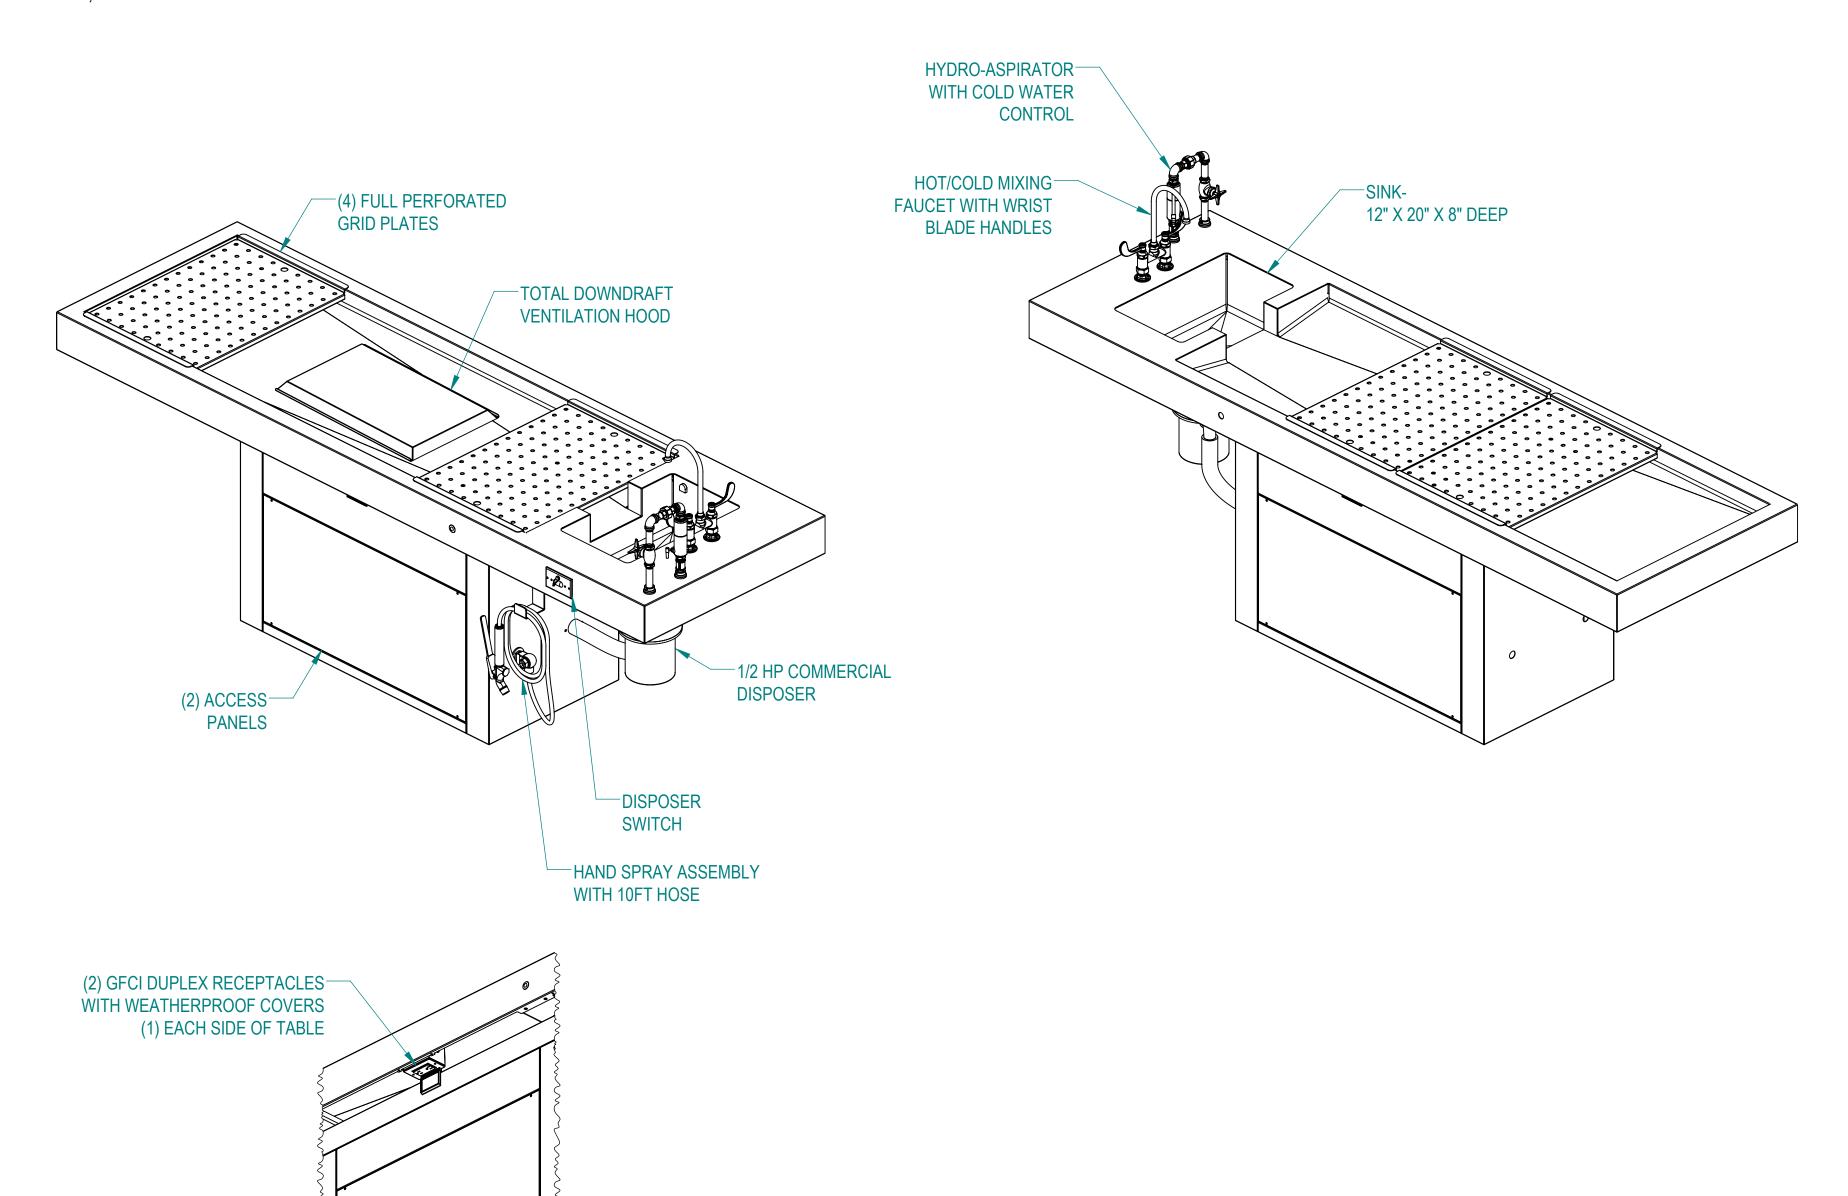

CUSTOMER			PROPRIETARY  THIS DOCUMENT AND THE DATE DISCLOSED HEREIN AND HEREWITH IS NOT TO BE REPRODUCED, USED, OR OTHERWISE DISCLOSED IN WHOLE OR IN PART TO ANYONE WITHOUT WRITTEN			GROUP ELEVATING PATHOLOGY  STATEMENT ASSOCIATION  ASSOCIATION				
PROJECT			DO NOT SCALE DRAWING  MATERIAL	APPROVALS DATE		MODEL 1036-41-TD (CE100) PEDESTAL AUTOPSY TABLE, VENTED				
	SIGNATURE	DATE	304 STAINLESS STEEL #4	ELISEO S. CHECKED BY  APPROVED BY	10/10/24	SIZE DWG NO. C SCALE 1:12	NEXT ASSY.	86-41-TD	REV. A	

## **UTILITY REQUIREMENTS:**

- A 4" X 5" AREA FOR INLET PLUMBING TO INCLUDE THE FOLLOWING:

   (1) COLD WATER SUPPLY, 3/4" OD COPPER STUBBED OUT 6"
   (1) HOT WATER SUPPLY, 1/2" OD COPPER STUBBED OUT 6"
   SUPPLY SHUT-OFF VALVES AT EACH WATER SUPPLY
   FLUSH LINES CLEAR BEFORE CONNECTING TO STATION
- 2. (1) STANDARD 1 1/2" WASTE LINE STUBBED OUT 6" SUPPLY P-TRAP FOR DRAIN
- 3. A 4" X 4" AREA FOR ELECTRICAL INPUT TO INCLUDE THE FOLLOWING:
  - (1) 115V/60Hz/1PH/15A CIRCUIT FOR STATION
  - (1)115V/60Hz/1PH/15A CIRCUIT FOR DISPOSER
- 4. A 6" DIA DUCT EXHAUST CONNECTION:

RECOMMENDED EXHAUST: 450-500 CFM AT 0.50 STATIC PRESSURE MEASURED AT THE 6" EXHAUST, PROVIDE WATER CAP OVER DUCT INLET. EXISTING CONDITIONS MAY WARRANT AN INCREASE OR DECREASE, CONTACT YOUR ENGINEERING DEPT.

- 5. PROVIDE 60-65 PSI WATER PRESSURE AND 4 GALLONS PER MINUTE OF FLOW FOR PROPER OPERATION OF HYDRO ASPIRATOR
- 6. ELECTRICIAN TO PROVIDE LIQUID TIGHT JUNCTION BOX AND CONDUIT PER LOCAL CODES.

