


NOTES: UNLESS OTHERWISE SPECIFIED

1. APPLICABLE STANDARDS AND SPECIFICATIONS; ASME Y14.5-2009, DIMENSIONING AND TOLERANCING ASME Y14.5-2007, ABBREVIATIONS

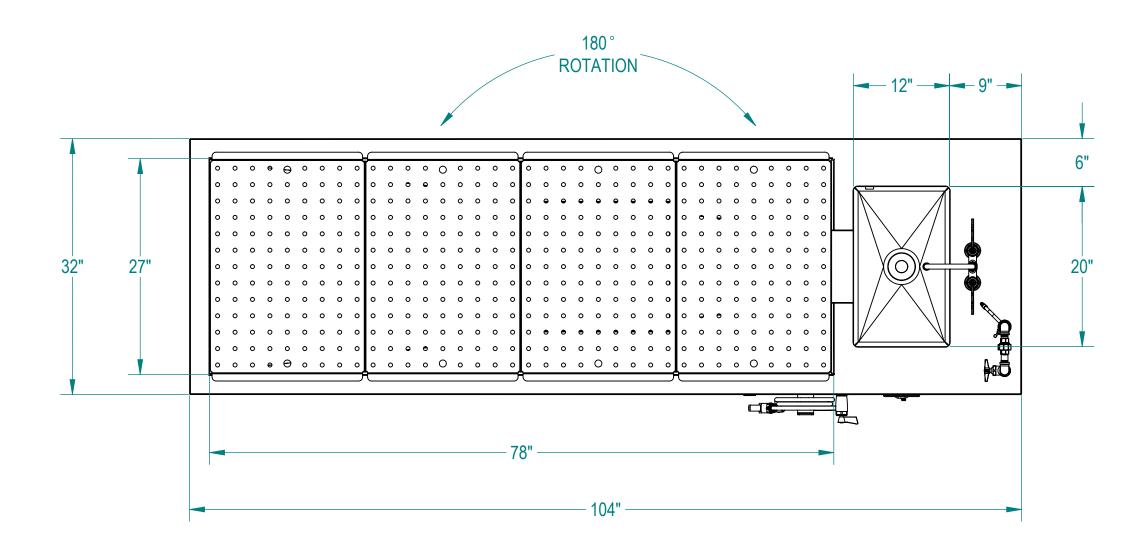

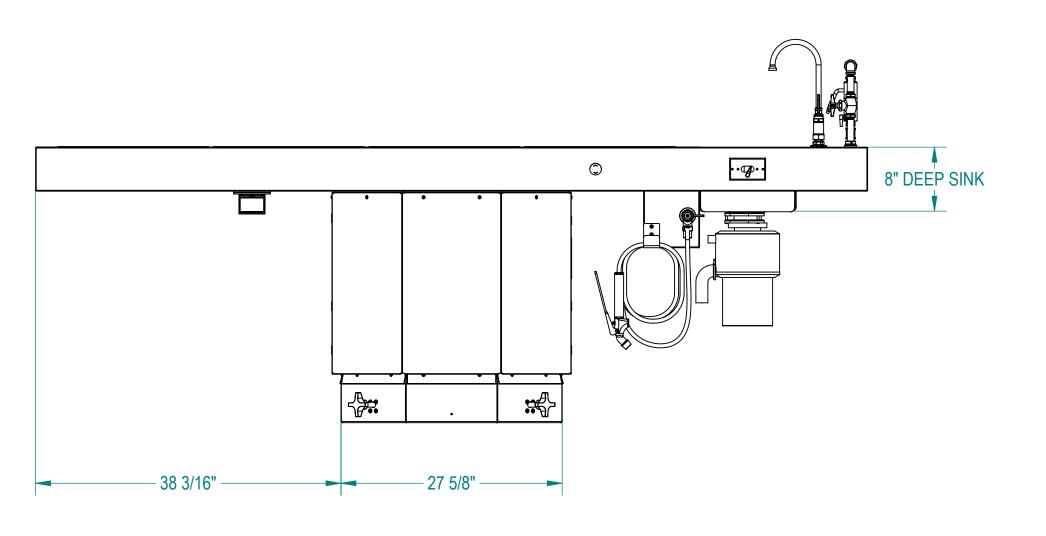


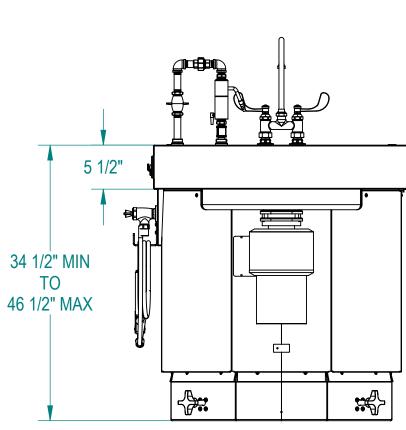

CUSTOMER PROJECT	APPROVAL		PROPRIETARY THIS DOCUMENT AND THE DATE DISCLOSED HEREIN AND HEREWITH IS NOT TO BE REPRODUCED, USED, OR OTHERWISE DISCLOSED IN WHOLE OR IN PART TO ANYONE WITHOUT WRITTEN AUTHORIZATION FROM MOPEC GROUP.				PEC	ELEVATING PATHOLOGY MORTECH ANGELOGIA OF MORE GROUP	411 North Aerojet Azusa, CA 91702 tel: (800) 410-0100 (fax: (626) 334-1704 www.mortechmfg.co)
PROJECT						MODEL 1036-48-MG (CE310)				
			DO NOT SCALE DRAWING	APPROVALS	DATE	PEDES	STAL ALITOPS	Y TARLE FLEV	ATING & RO	TATING
		T	MATERIAL	DRAWN BY		PEDESTAL AUTOPSY TABLE, ELEVATING & ROTATING				
	SIGNATURE	DATE	304 STAINLESS STEEL	ELISEO S.	03/27/25	SIZE DWG NO.	4.0	22 12 112		REV.
			FINISH	CHECKED BY		C	103	36-48-MG		A
			#4	APPROVED BY		SCALE 1:12	NEXT ASSY.		SHEET 1	OF 3


NOTES: UNLESS OTHERWISE SPECIFIED

1. APPLICABLE STANDARDS AND SPECIFICATIONS; ASME Y14.5-2009, DIMENSIONING AND TOLERANCING ASME Y14.5-2007, ABBREVIATIONS

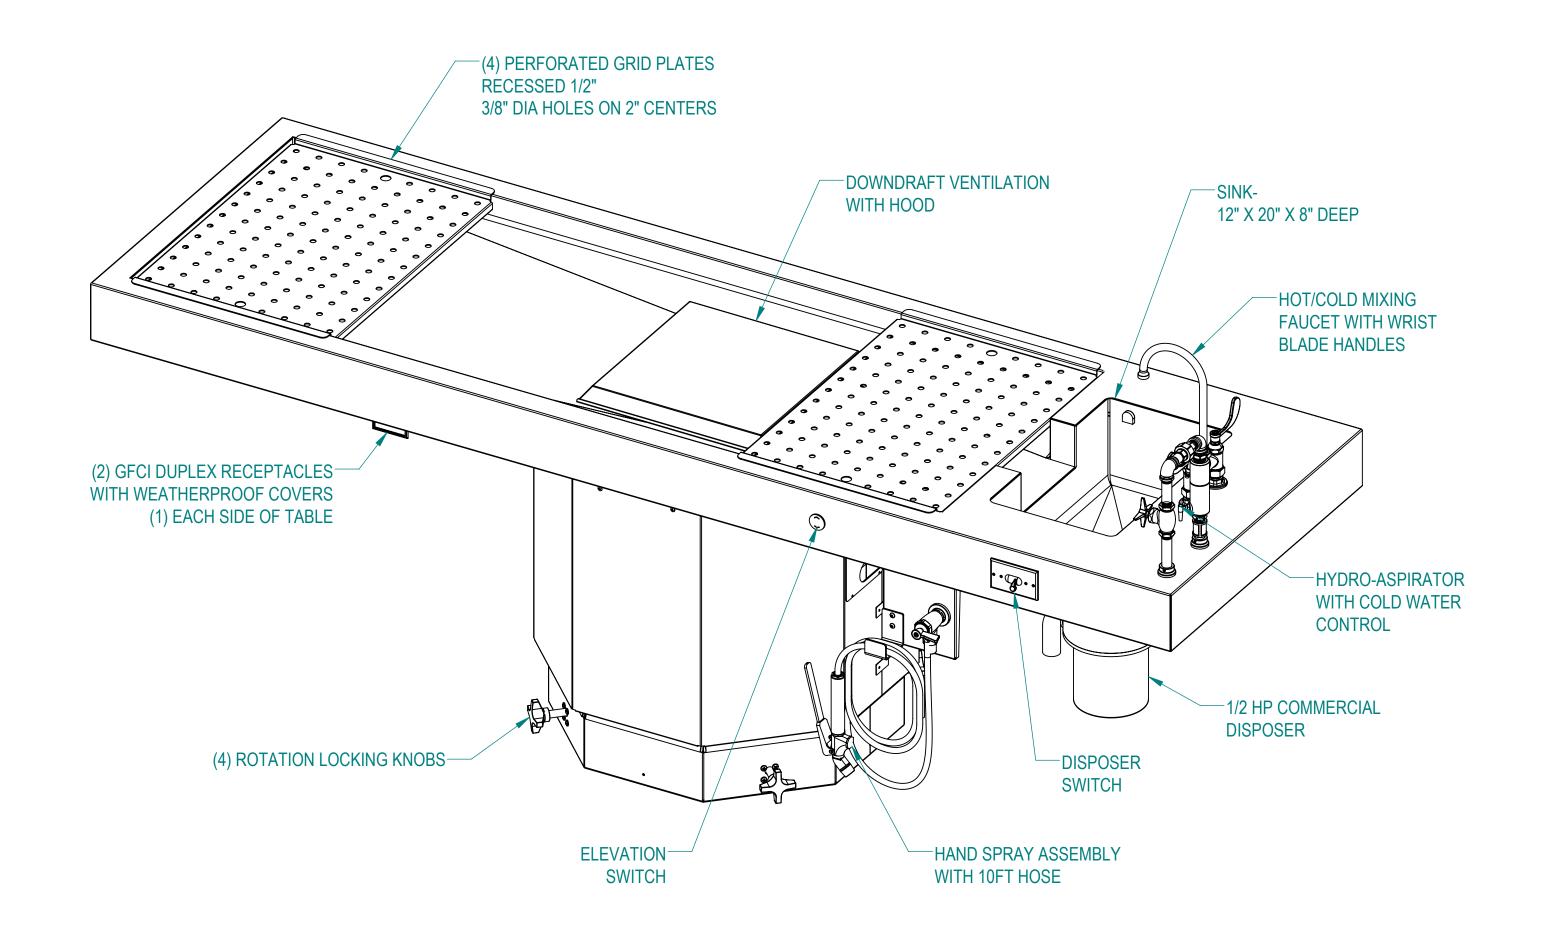

CUSTOMER	APPROVAL		THIS DOCUMENT AND TH AND HEREWITH IS NOT TO BE RI DISCLOSED IN WHOLE OR IN PA	PROPRIETARY THIS DOCUMENT AND THE DATE DISCLOSED HEREIN AND HEREWITH IS NOT TO BE REPRODUCED, USED, OR OTHERWISE DISCLOSED IN WHOLE OR IN PART TO ANYONE WITHOUT WRITTEN			ZIVIOPEC AZ	11 North Aerojet Avenue zusa, CA 91702 :l: (800) 410-0100 (626) 334-1471 x: (626) 334-1704 ww.mortechmfg.com	
PROJECT			AUTHORIZATION FROM MOPEC GROUP.			MODEL 1036-48-MG (CE310)			
			DO NOT SCALE DRAWING MATERIAL	APPROVALS DRAWN BY	DATE	PEDESTAL AUTOPS	SY TABLE, ELEVATII	NG & ROTATING	
	SIGNATURE	DATE	304 STAINLESS STEEL	ELISEO S. CHECKED BY	03/27/25	SIZE DWG NO.	36-48-MG	REV.	
			FINISH #4	APPROVED BY		SCALE 1:8 NEXT ASSY.	SHEET	2 OF 3	

UTILITY REQUIREMENTS 1. INLET PLUMBING 1A. (1) COLD WATER SUPPLY, 1/2" OD COPPER STUBBED OUT 6" 1B. (1) HOT WATER SUPPLY, 1/2" OD COPPER STUBBED OUT 6" SUPPLY SHUT-OFF VALVES AT EACH WATER SUPPLY 2. (1) 2" DRAIN. (SEE DRAIN DETAIL) 3. A 4" X 4" AREA FOR ELECTRICAL INPUT TO INCLUDE THE FOLLOWING: (1) 115V/60Hz/1PH/20A CIRCUIT FOR STATION (1) 115V/60Hz/1PH/20A CIRCUIT FOR DISPOSAL 4. PROVIDE 60-65 PSI WATER PRESSURE AND 4 GALLONS PER MINUTE OF FLOW FOR PROPER OPERATION OF HYDRO-ASPIRATOR ELECTRICIAN TO PROVIDE LIQUID TIGHT JUNCTION BOX AND CONDUIT PER LOCAL CODES. FLUSH LINES CLEAR BEFORE CONNECTING TO STATION. 7. EXHAUST RECOMMENDATION: 275-400 CFM. EXISTING CONDITIONS MAY WARRANT AN INCREASE OR DECREASE, CONTACT YOUR ENGINEERING DEPT. •••₽••• 0

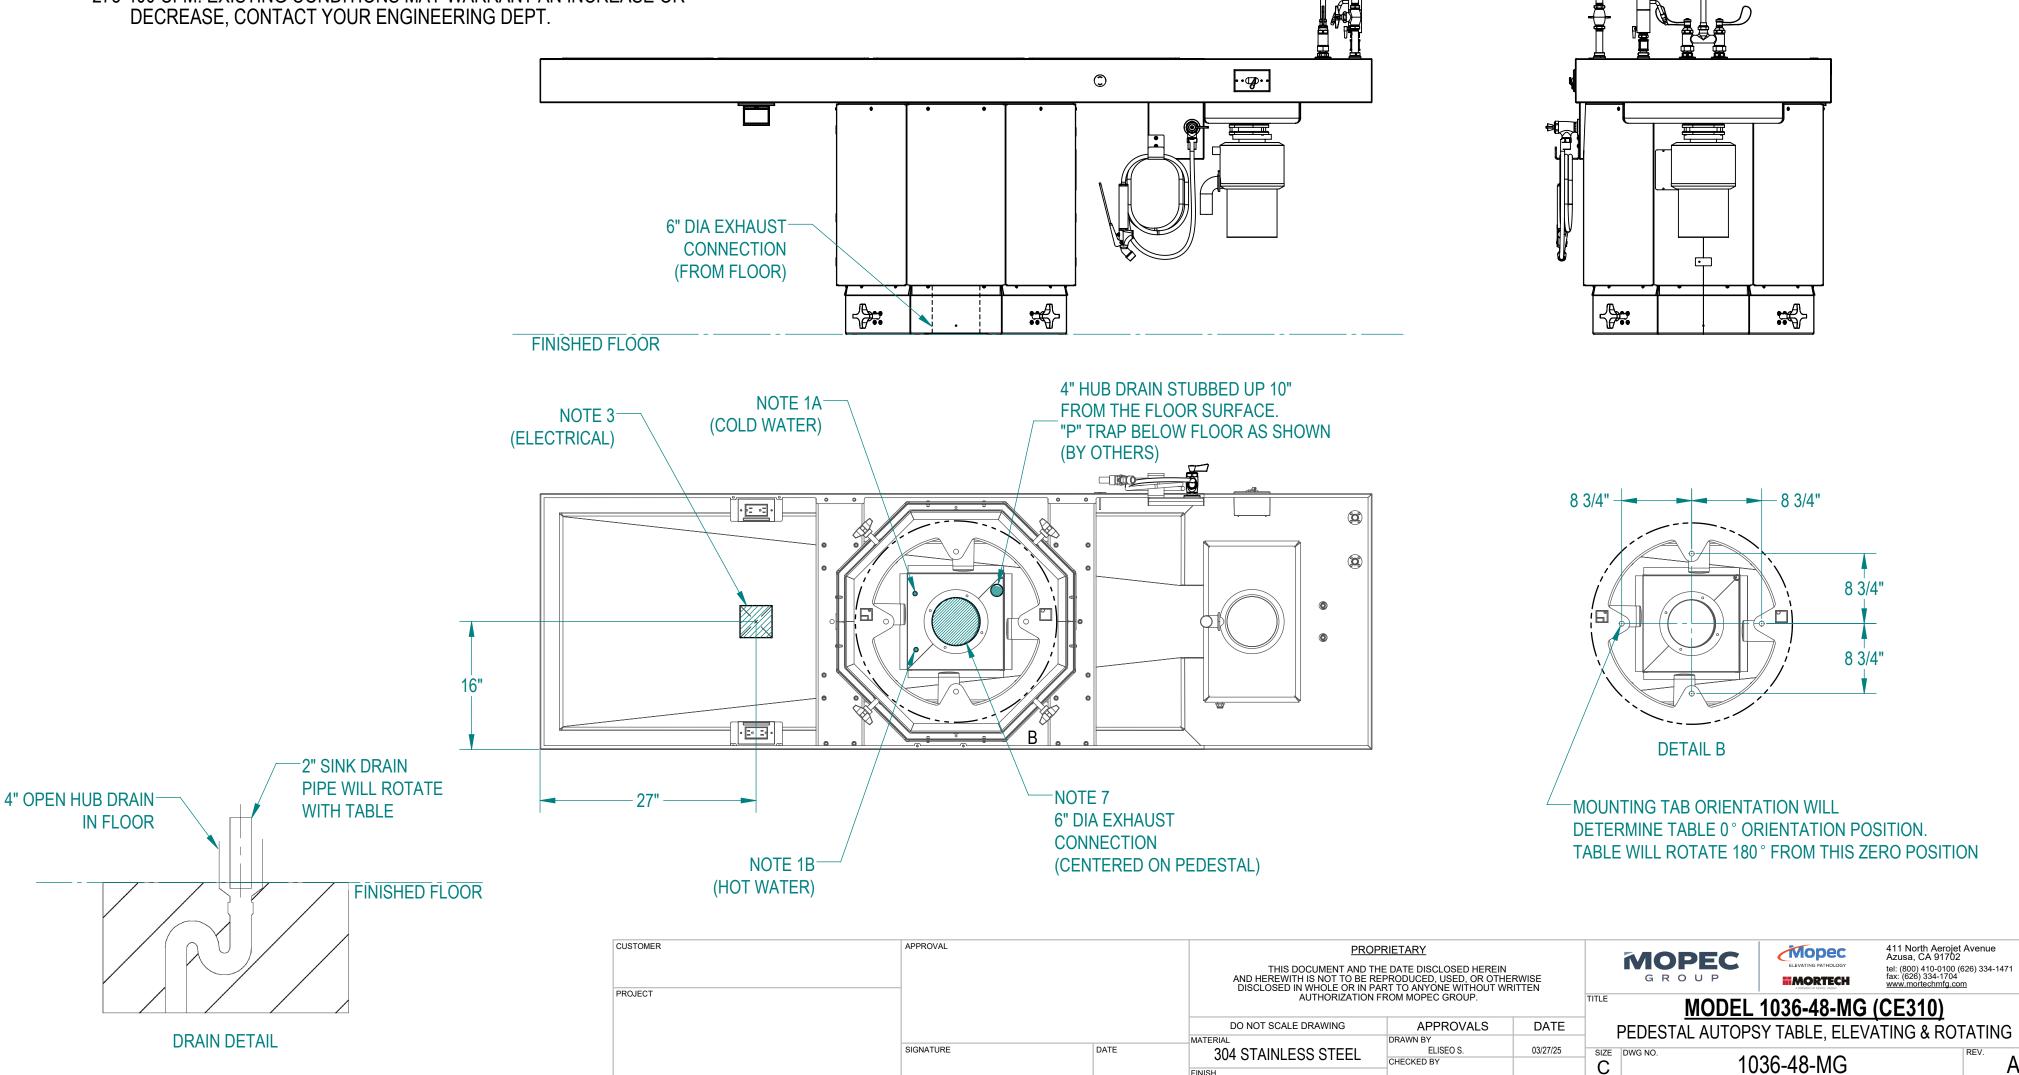

SCALE 1:12

3 OF

APPROVED BY